



# Physical CHEMISTRY

*An Indian Journal*

**Full Paper**

PCAIJ, 9(7), 2014 [239-246]

## Simulation of uniform and apodized fiber bragg grating

Mohamed M.Saleh<sup>1</sup>, Riadh K.A.Al-ani<sup>2</sup>, Ilham K.Onees<sup>2\*</sup>

<sup>1</sup>University of Technology, Department of Laser and Optics Engineering, Baghdad, (IRAQ)

<sup>2</sup>The University of Mustansiriyah, College of Science, Physics Department, Baghdad, (IRAQ)

E-mail : elhamonees@yahoo.com

### ABSTRACT

This paper presents the simulation of an optical fiber Bragg grating for maximum reflectivity, minimum side lobe. The reflection spectra, side lobes strength and bandwidth were simulated with different lengths. The side lobes have been suppressed using raised cosine apodization while maintaining the peak reflectivity. The simulations are based on using Optigratings software. © 2014 Trade Science Inc. - INDIA

### KEYWORDS

Fiber Bragg grating;  
Reflection;  
Apodization;  
Simulation  
Optigratings software.

### INTRODUCTION

Optical fiber gratings are important components in fiber communication and fiber sensing fields. For normal fiber gratings, by properly choosing the period, length, index modulation amplitude, chirp and apodization function, one can flexibly design and optimize grating reflection or transmission spectra to satisfy many applications<sup>[1]</sup>. FBGs take the advantages of a simple structure, low insertion loss, high wavelength selectivity, polarization insensitivity and full compatibility with general single mode communication optical fibers. Properly manufactured FBGs offer high reflectances and narrow bandwidths at the Bragg wavelength. All this makes them suitable for applications in fiber optical communications, e.g. as WDM demultiplexers, fiber laser technique and fiber sensor system<sup>[2]</sup>. FBG is a periodic or aperiodic perturbation of the effective absorption coefficient and/or the effective refractive index of an optical waveguide. They typically reflect light over a narrow wavelength range which satisfy the Bragg condition and transmit all other wave-

lengths, but they also can be designed to have more complex spectral responses<sup>[3]</sup>.

There are a number of parameters on which the spectra of FBG has shown dependency such as change in refractive index, bending of fiber, grating period, mode excitation conditions, temperature and fiber Bragg grating length<sup>[4-6]</sup>.

### THEORY

In this paper we perform a simulation of fiber Bragg grating with different length of grating. The simulated was analyzed and designed by calculating length of grating, Such simulations are based on solving Bragg condition equations that describe the changing Bragg wavelength with changing effective index of refraction of the fiber and length of grating.

The Bragg grating wavelength equation describe by  $\lambda_{\text{Bragg}} = 2nE$ , where  $n$  and  $E$  are the effective index of the fiber and the grating period in the fiber respectively. The results and discussion about the simulation work done on FBGs at typical specifications using Optigratings software.

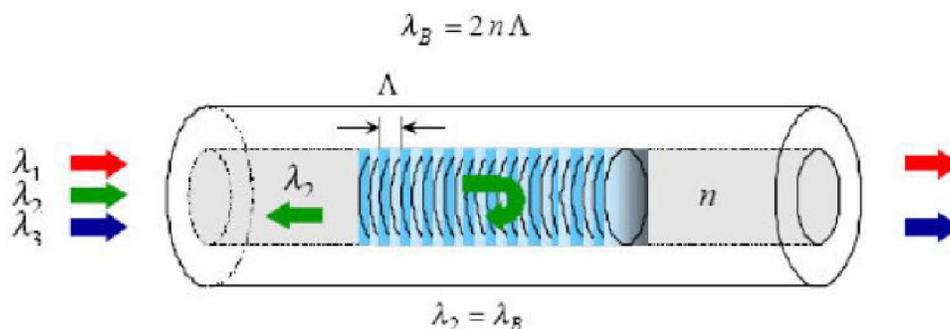


Figure 1 : Principle of operation of a fiber bragg grating

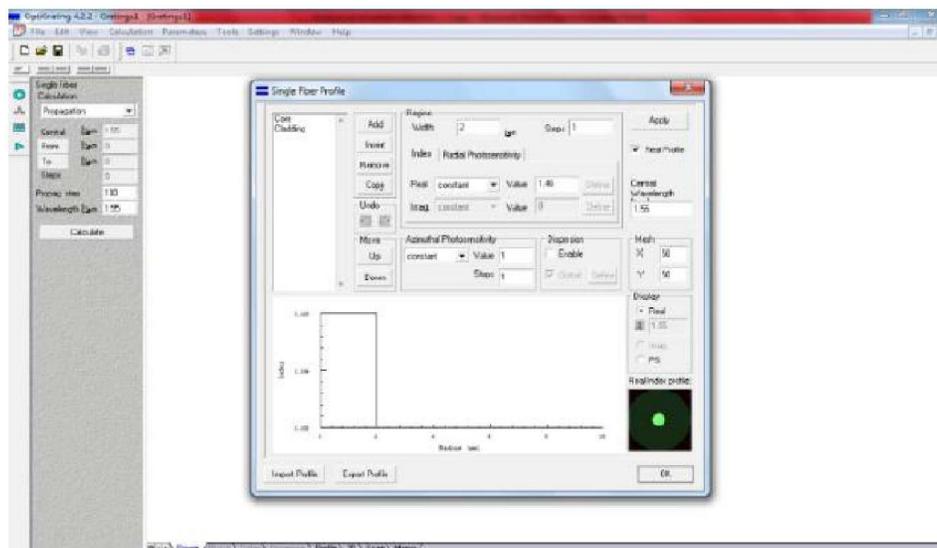


Figure 2 : The dialog box of waveguide profile

TABLE 1: The Parameters of the designed FBG

Parameters	Setting
Grating shape	sine
Average index	Uniform
Period chirp	No chirp
Apodization	No apodization
Length (L)	05 to 45 mm
Index modulation amplitude ( $\Delta n$ )	0.0001
Grating period	0.52762870 $\mu\text{m}$
Waveguide width	9 $\mu\text{m}$
Waveguide thickness	9 $\mu\text{m}$
Core index	1.47
Cladding index	1.457

## SIMULATION RESULTS AND DISCUSSION

The reflectance spectra of the reflection FBGs were simulated by using Optigratings software. Figure 2 shows the dialog box of waveguide profile to design FBG.

The basic parameters of uniform FBG, as shown in TABLE 1 and the dialog box in Figure 3.

Reflection spectra were obtained and analyzed for different values of grating length (TABLE 2). It was confirmed that the spectral properties of uniform gratings come out to be similar to the sinc function. The reflection spectra for different grating lengths of 5 mm, 7 mm, 10 mm, 15 mm, and 25 mm are shown below in (Figure 4, 5, 6, 7, 8). At  $L=05\text{mm}$ ,  $07\text{mm}$ ,  $10\text{mm}$ ,  $15\text{mm}$  and  $25\text{mm}$ , successively the maximum reflectivity is 58.15%, 78.51%, 92.99%, 99.03%. At  $L=25\text{mm}$ , the reflectivity reached 99.98% but with an increase in the reflectivity of side lobes. After that, if the length is incremented further, it is observed that the maximum reflectivity maintains the same value of 99.99%. Also, we noted that the bandwidth decreases with increasing grating length.

As shown in Figure 9, it was confirmed that the simulated uniform FBG showed better performance as the

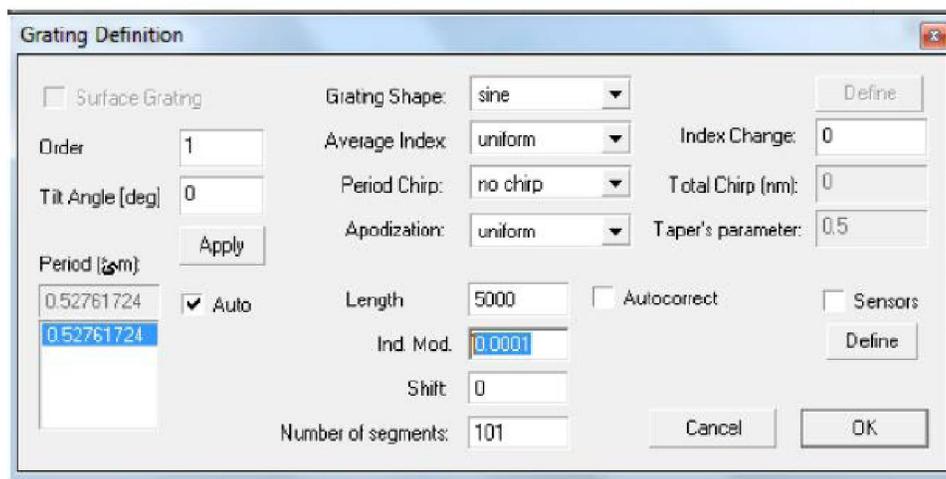


Figure 3 : The dialog box of the FBG

TABLE 2 : Reflectivity and bandwidth of uniform FBG for different grating lengths

Grating Length (mm)	Reflectivity Obtained (%)	Bandwidth (nm)
05	58.15	0.1896
07	78.51	0.1632
10	92.99	0.144
15	99.03	0.1272
16	99.35	0.1272
18	99.71	0.1224
20	99.86	0.1201
22	99.94	0.1176
25	99.98	0.1124
28	99.99	0.1062
30	99.99	0.1062
35	99.99	0.1062
40	99.99	0.1062

grating length increased and achieved 99.98 % reflection at the grating length of 25 mm. A very effective method for eliminating the side-lobes of an FBG is apodization. Apodization is achieved by a contoured inscription of the grating in order to reduce the refractive index change towards the ends of the grating. Other apodization functions that are used in the communications industry include pure cosine, Gaussian, sinc and Kaiser profiles<sup>[7-10]</sup>.

Figure 10, 11, 12, 13, 14 illustrates the reflectance spectrum response of an apodized FBG for different grating length. At L=10mm, 20mm, 30mm, 40mm and 50mm the maximum reflectivity is 60.94%, 94.10%, 99.25%, 99.86% and 99.99% as shown in TABLE 3.

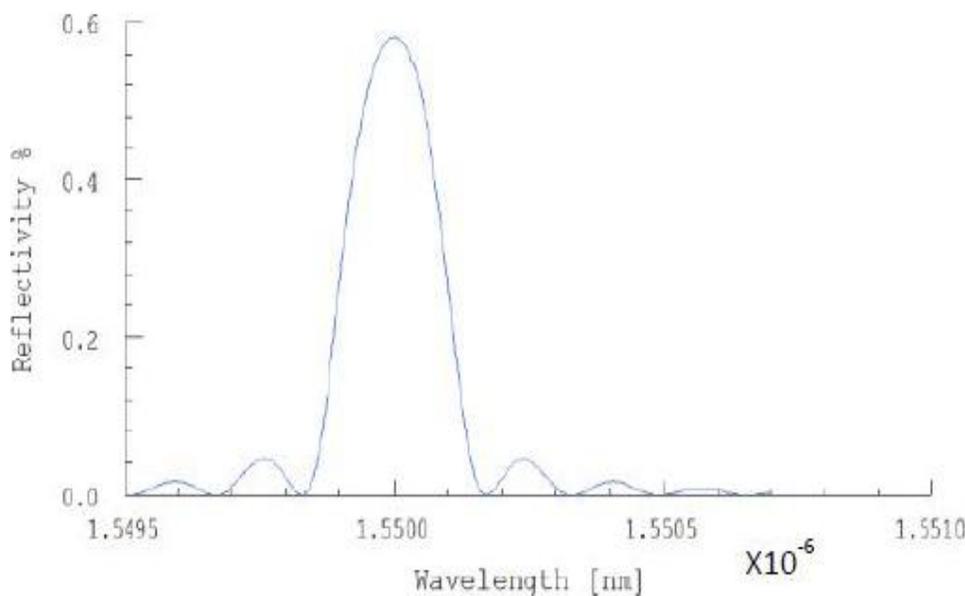
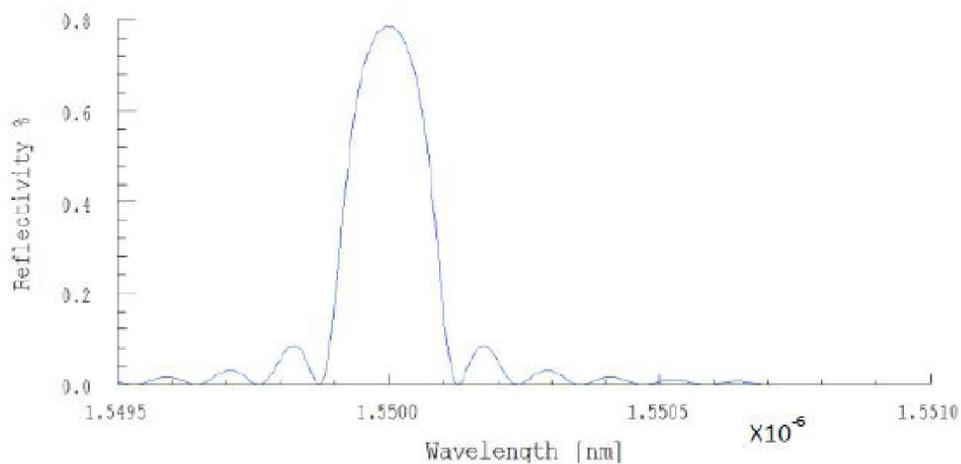
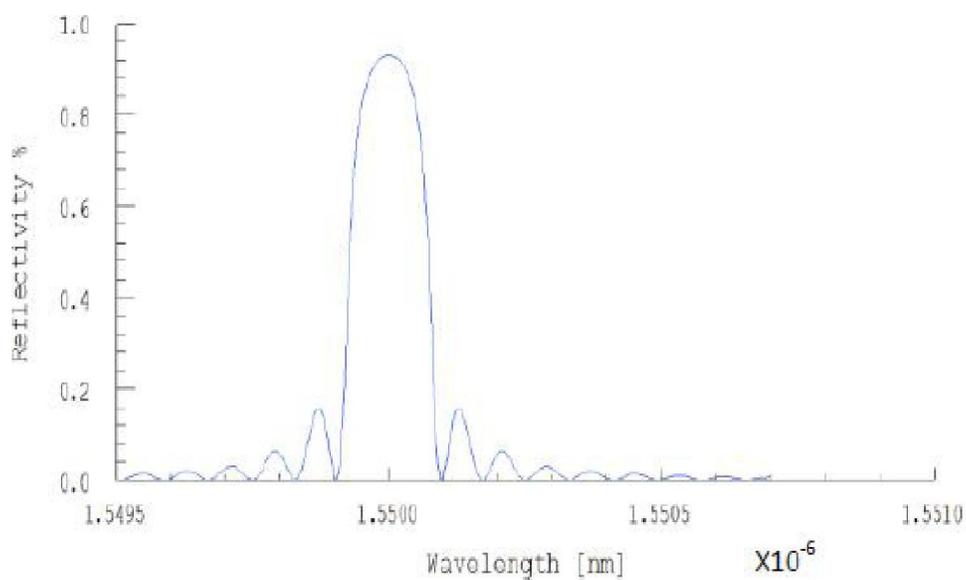
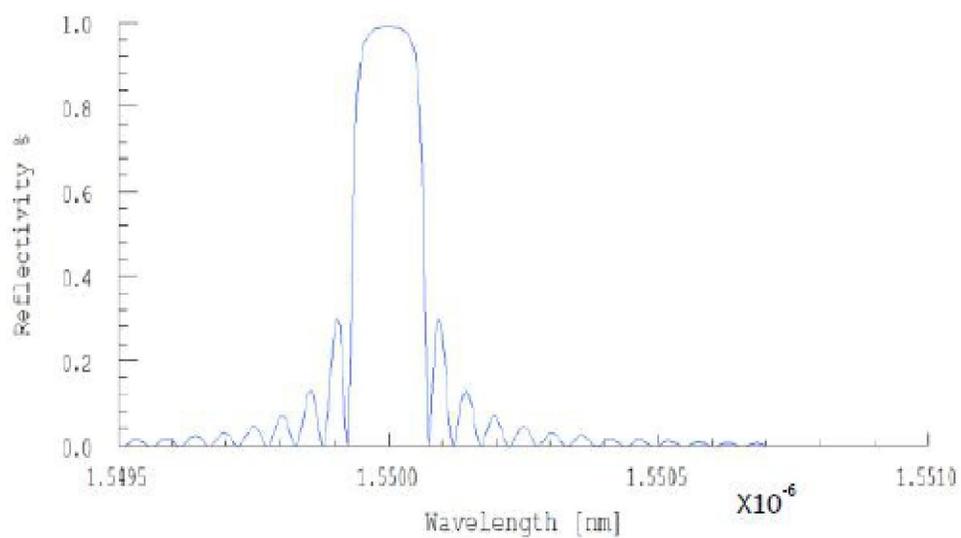


Figure 4 : Reflection spectrum at L=05mm

**Full Paper****Figure 5 : Reflection spectrum at L=07mm****Figure 6 : Reflection spectrum at L=10mm****Figure 7 : Reflection spectrum at L=15mm**

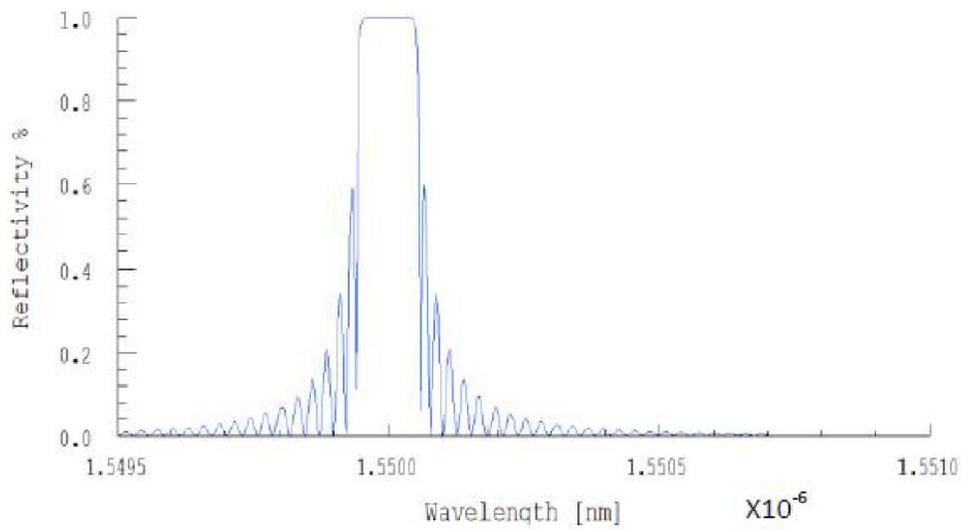


Figure 8 : Reflection spectrum at L=28mm

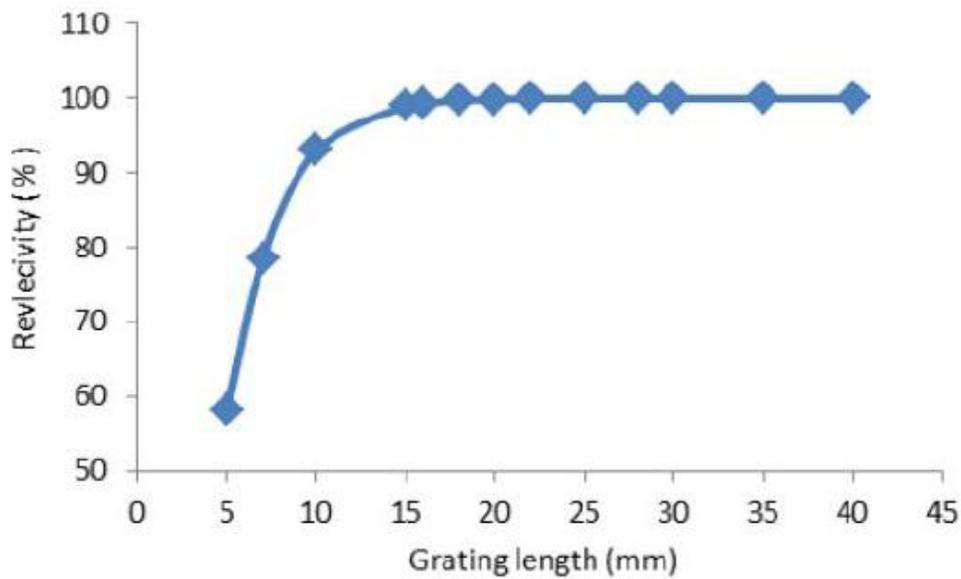


Figure 9 : Relation between uniform FBG reflectivity and grating length

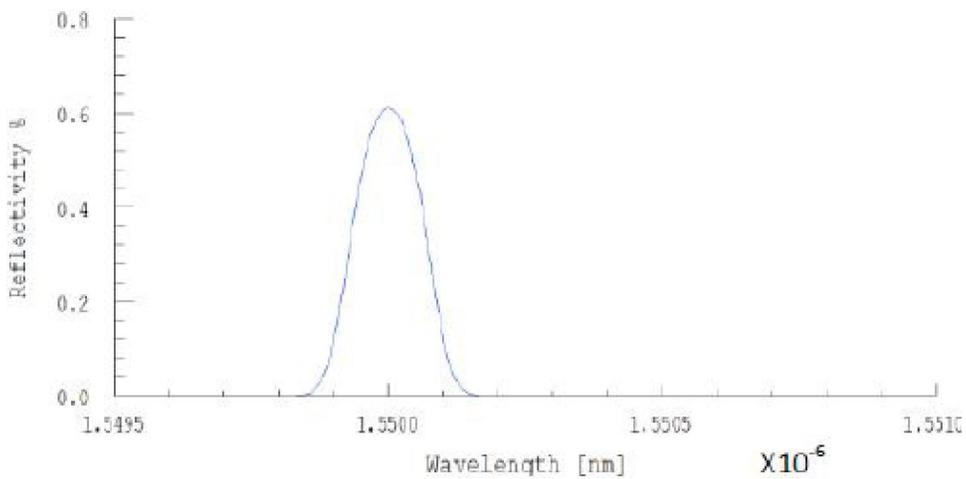


Figure 10 : Apodized reflectance spectrum at L=10mm

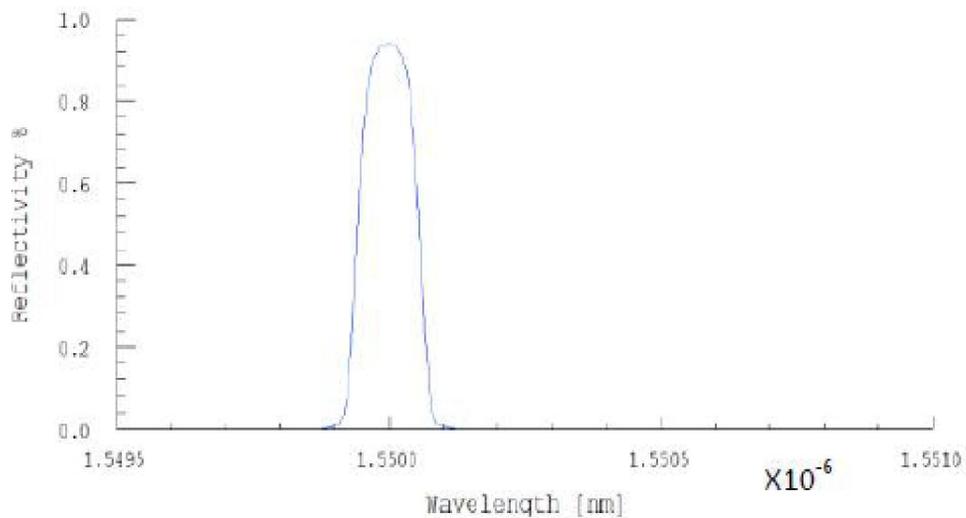


Figure 11 : Apodized reflectance spectrum at  $L=20\text{mm}$

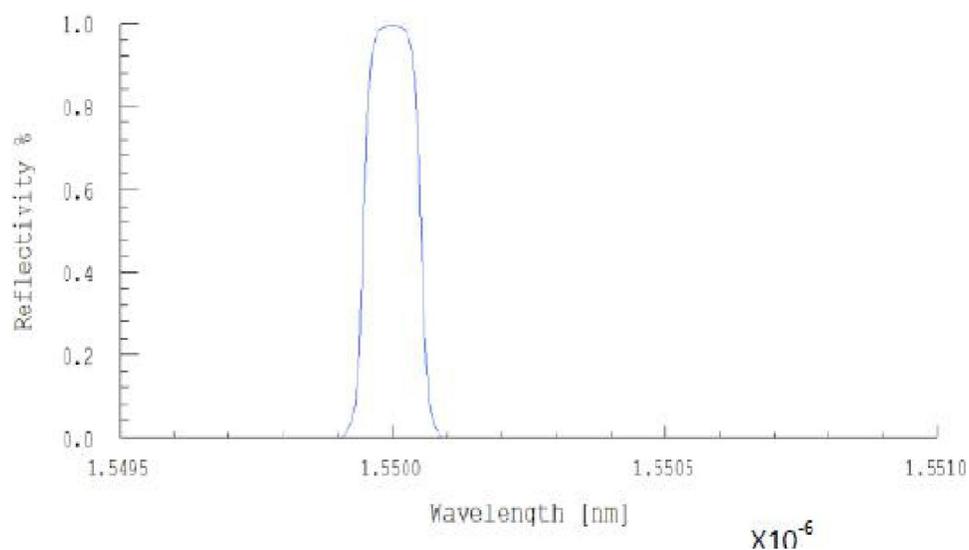


Figure 12 : Apodized reflectance spectrum at  $L=30\text{mm}$

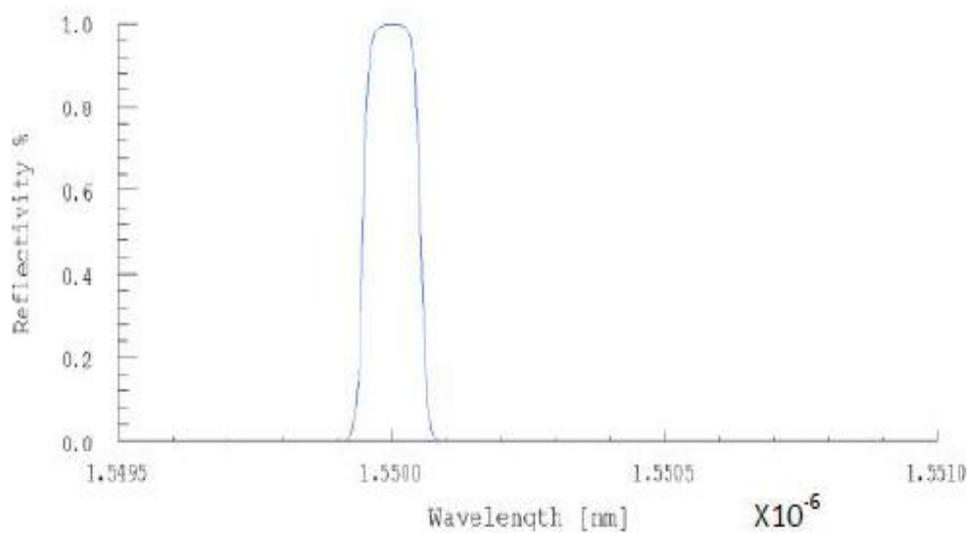


Figure 13 : Apodized reflectance spectrum at  $L=40\text{mm}$

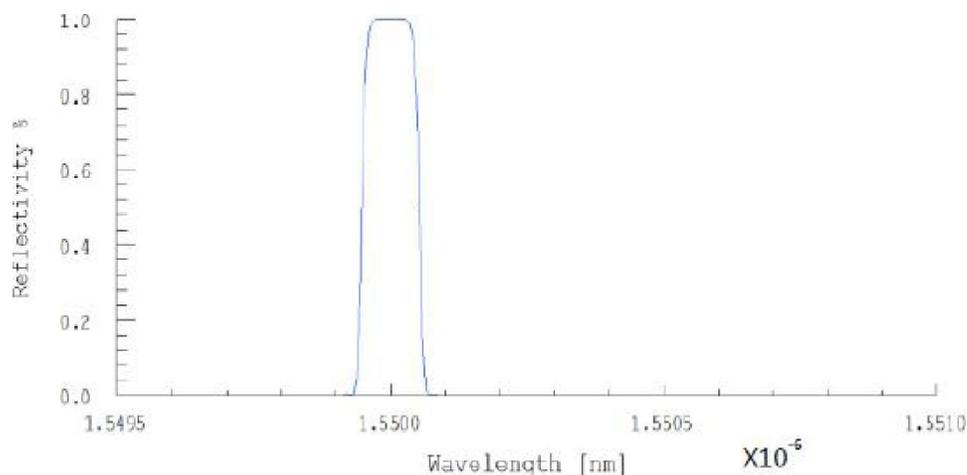


Figure 14 : Apodized reflectance spectrum at L=50m

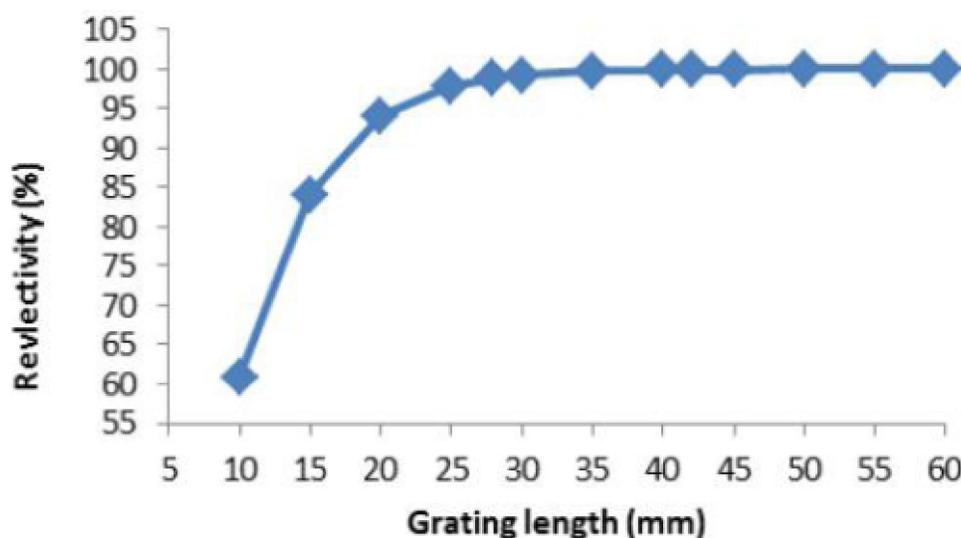


Figure 15 : Relation between apodized FBG reflectivity and grating length

TABLE 3 : Reflectivity and bandwidth of apodized FBG for different grating lengths

Grating Length (mm)	Reflectivity Obtained (%)	Bandwidth (nm)
10	60.94	0.1464
15	84.10	0.1224
20	94.10	0.1128
25	97.89	0.1082
28	98.87	0.1056
30	99.25	0.1032
35	99.74	0.1032
40	99.86	0.1032
42	99.94	0.1032
45	99.97	0.1032
50	99.99	0.1032
55	99.99	0.1032
60	99.99	0.1032

Note that all of side lobes have been completely eliminated but reflected power can be increased by increasing the length of apodized FBG, while bandwidth decrease.

As shown in Figure 15. upon consideration of the reflectivity elevation of apodized FBG, it was confirmed that the simulated apodized FBG showed better performance as the grating length increased and achieved 99.99 % reflection at the grating length of 50mm.

### CONCLUSION

In this paper we have described the signal characteristics of FBG with various grating lengths using simulation software. The conclusions obtained from this study are as follows.

## Full Paper

1. The reflectivity of fiber grating increases with the increase in grating length.
2. For uniform fiber Bragg grating the reflectivity increased with the elevation of grating length until reached 99.99% in reflection and maintained constant for this value for longer length.
3. For Raised cosine Apodization the reflected power increased by increasing the length of apodized FBG. The reflectivity increased until reached 99.99% and maintained constant for this value for longer length.
4. The increase of the grating length for uniform and Apodized FBG causes the bandwidth decrease and maintained constant for longer length.

### REFERENCES

- [1] Erdogan, Turan; "Fiber Grating Spectra", Journal of Lightwave Technology, **15(8)**, 1277–1294 August (1997).
- [2] F.Ouellette; Fiber Bragg gratings, Spie's Oemagazine – The SPIE Magazine of Photonics Technologies and Applications, **1(1)**, 38-41 (2001).
- [3] Andreas Othenos, Kyriacos Kalli; "Fiber Bragg Gratings – Fundamentals and Applications in Telecommunications and Sensing", Artech House.
- [4] Ho SzePhing, Jalil Ali, Rosly Abdul Rahman, Bashir Ahmed Tahir; "Fiber Bragg grating modeling, simulation and characteristics with different grating lengths", Journal of Fundamental Sciences, July (2007).
- [5] Ravijot Kaur, Manjit Singh Bhamrah; "Effect of Grating length on Reflection Spectra of Uniform Fiber Bragg Gratings" International Journal of Information and Telecommunication Technology, ISSN (Online), **3(2)**, 0976-5972 (2011).
- [6] Sunita Ugale et al.; "Fiber Bragg Grating Modeling, Characterization and Optimization with different index profiles", International Journal of Engineering Science and Technology, **2(9)**, 4463-4468 (2010).
- [7] Reema Sharma, Rajesh Rohilla, Mohit Sharma, Dr.T.C.Manjunath; Design & Simulation of Optical Fiber Bragg Grating Pressure Sensor for minimum attenuation criteria, Journal of Theoretical and Applied Information Technology © (2005-2009) JATIT.
- [8] A.Herma, W.Hugang; «Coupled-Mode Theory», IEEE, Proceedings Of the IEEE, **19**, 1505-1518 (1991).
- [9] H.A.Haus, W.P.Huang, S.Kawakami, N.A.Whitaker; "Coupled-Mode Theory of Optical Waveguides", IEEE, Journ. of Ligth. Tech., **05**, 16-23 (1987).
- [10] B.B.Padhy et al.; "optimization of intrgrating sensing using fiber Bragg grating" International Journal of Engineering Science and Technology, **2(9)**, 4463-4468 (2010).