



Trade Science Inc.

Environmental Science

An Indian Journal

Current Research Paper

ESAIJ, 4(3), 2009 [114-119]

Efficiency of the electrodialysis technique for the removal of cadmium and cyanide from galvanic industry wastewaters

Yasser Hannachi*, Aymen Hannachi

Department of Physic Chemistry, Engineering Institute of Tunis, Tunis, (TUNISIA)

E-mail : yasser_102@yahoo.fr

Received: 24th April, 2008 ; Accepted: 29th April, 2008

ABSTRACT

This study deals with the removal of cadmium and cyanide from galvanic industry wastewaters. The use of the electrodialysis technique for the treatment of a synthetic wastewater containing approximately $0.0089 \text{ mol L}^{-1}$ cadmium and 0.086 mol L^{-1} cyanide was studied using a five-compartment electrodialysis cell. The extraction of cadmium and cyanide depends on the applied current density and it is limited by the precipitation of cadmium on the cation-exchange membrane in the diluate central cell compartment.

© 2009 Trade Science Inc. - INDIA

KEYWORDS

Electrodialysis cell;
Cation-exchange membrane;
Current density;
Cell voltage;
Cyanide.

INTRODUCTION

The release of industrial wastewaters containing cadmium and cyanide to the environment is strictly controlled due to the toxic nature of these substances. To reduce the environmental impacts it is necessary to remove these substances from wastewater before its discharge in the environment^[1]. One of the largest cadmium and cyanide sources, which contributes largely to water pollution, are the electroplating industries that use cadmium cyanide baths. The main problems associated to this process, from the environmental point of view, are the deposition baths and rinsewaters discharges. The alkaline-chlorination process for cyanide destruction with further cadmium hydroxide precipitation is a common method employed for the treatment of the wastewaters characterized by the presence of these substances. However, chlorination of cyanides can result in highly toxic intermediates (cyanogen chlorides) and other toxic organo-chlorines

that can be formed. These compounds together with residual chlorine create additional environmental problems. Metal precipitation can generate a large amount of cadmium hydroxide sludge classified as dangerous waste by the European Regulation-NER10004^[2] and its appropriate disposition constitutes a serious environmental and economical problem for the involved industries. The development of more advanced technologies for wastewater treatment has increased in last years and new techniques have been suggested as promising possibilities, not only for the removal but also for the recovery of substances present in the wastewater^[6-9]. Among these new techniques, electrodialysis can be mentioned^[10-13]. Electrodialysis is a membrane separation process in which ionic species in solution are transported through ion-exchange membranes, under the influence of an electric field from one solution to another.

In an electrodialysis stack, as shown in (Figure 1), cation-exchange and anion-exchange membranes are

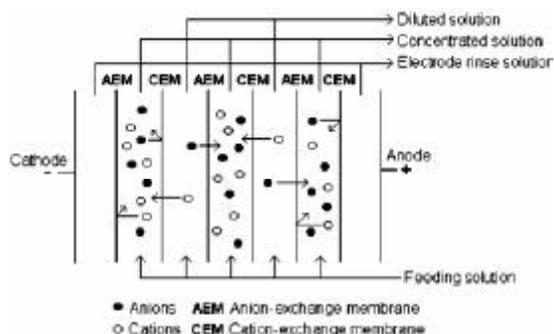


Figure 1: Electro dialysis technique principle

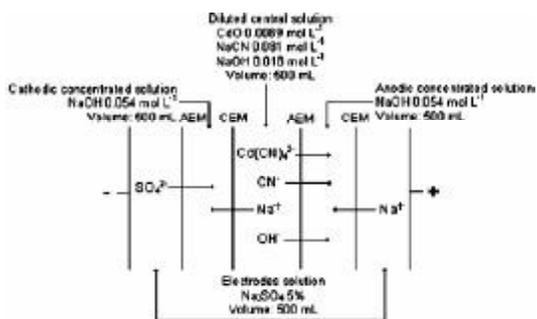


Figure 2: Five- compartment electro dialysis cell and the expected transport of the ionic species

alternately arranged in a filter press-like system to form diluted and concentrated flows between the membranes. The electrodes, disposed at the end of the stack, are in contact with an electrode rinse solution. The applied direct current electric field produces the transport of cations towards the cathode and anions towards the anode. During this transport anions are able to permeate through the anion-exchange membrane, but are blocked by the cation-exchange membrane. The opposite occurs with cations. As a result, two different solutions are produced inside the stack: one more diluted (the diluate) Removal of Cadmium and Cyanide from Aqueous Solutions through Electrodialysis and another more concentrated (the concentrate) than the feeding solution^[14,15]. Considering that this membrane separation technique is able to transform a concentrated solution in two other solutions, one more concentrated and another more diluted than the original solution (feeding solution), electro dialysis presents large application in what concerns the galvanic industries wastewater treatment, because it makes it possible to reuse the more diluted solution as rinsewater and the more concentrated solution in the deposition bath^[16,17]. The objective of this work was to verify the possibility of use of the

electrodialysis technique to remove cadmium and cyanide from a synthetic wastewater containing approximately 0.0089 mol L⁻¹ cadmium and 0.086 mol L⁻¹ cyanide applying different current densities.

MATERIALS AND METHODS

Electrodialysis cell and solutions

The electro dialysis cell used in this work and represented in (Figure 2) was composed of five compartments separated alternately by cation-exchange and anion-exchange membranes. The cell was manufactured in transparent acrylic. The cation-exchange and anion-exchange membranes used were NAFION 450 and SELEMION AMV, respectively. The effective membrane area was 16cm². The two outer compartments contain the working electrodes (platinum sheets) both with 16 cm² effective area. The solutions in the three central compartments circulate independently while in the electrode compartments the same solution is circulated in closed circuit to avoid pH variations due to electrodes reactions. In each cell compartment 500mL of solution circulate. The solution to be treated (0.0089 mol L⁻¹ CdO, 0.086 mol L⁻¹ NaCN and 0.018 mol L⁻¹ NaOH) circulates in the diluate central cell compartment. A 0.054 mol L⁻¹ NaOH solution circulates in the anodic and cathodic concentrated cell compartments and a Na₂SO₄ 5% solution circulates in the electrodes compartments. The solutions were prepared with analytic grade reagents with distilled and deionized water. The current was applied through a 2.5A-80V power supply. The experiments were accomplished at least in duplicate at 25°C. Cadmium concentration in the solutions was measured by Inductively Coupled Plasma Spectroscopy. Cyanide was measured by direct titration with an AgNO₃ solution^[18]. The electro dialysis performance was evaluated in terms of percent extraction (pe) and current efficiency (ce), defined respectively by equations 1 and 2^[19,20].

$$pe = \frac{(C_i - C_f)}{C_i} \times 100 \tag{1}$$

Where C_i is the initial concentration of the ion and C_f is the final concentration of the ion

$$ce = \frac{zF(m_i - m_f)}{nI\Delta t} \times 100 \tag{2}$$

Current Research Paper

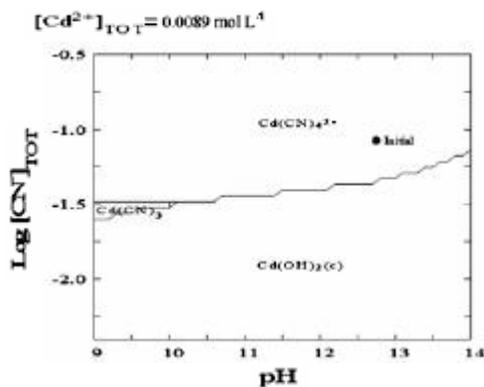


Figure 3: Speciation of cadmium and cyanide species as a function of the cyanide concentration and the solution pH ($0.0089 \text{ mol L}^{-1}$ cadmium)

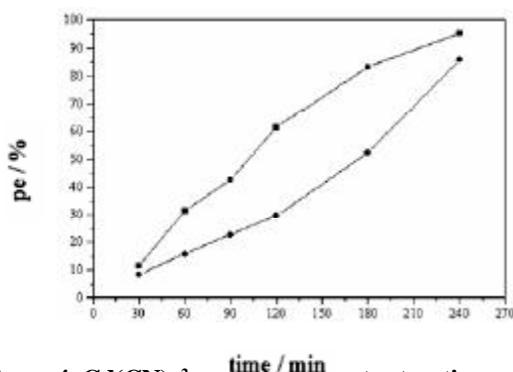


Figure 4: $\text{Cd}(\text{CN})_4^{2-}$ and CN^- percent extraction as a function of the electro dialysis time with a 20 mA cm^{-2} current density (●) $\text{Cd}(\text{CN})_4^{2-}$, CN^- (■)

Where z is the valency of the ion, F is the Faraday constant (96500 C mol^{-1}), m_i is the initial number of moles of the ion (moles), m_f is the final number of moles of the ion (moles), I is the electric current applied (A) and Δt is the time interval (s) and n is the number of membrane pairs. At the experiments done at this work, the number of membrane pairs was considered equal to one, since the work solution is in contact just with one membrane pair (diluate central cell compartment)

RESULTS AND DISCUSSION

Cadmium and cyanide transports through the ion-exchange membranes

The experiments accomplished in the electro dialysis cell demonstrate that cadmium and cyanide are predominantly in anionic form, since they are transported only through the anion-exchange membrane. This behavior can be explained by the formation of negatively charged coordination complexes between cadmium and

cyanide. Cadmium and cyanide, in different proportions, lead up to the formation of different cadmium cyanide complexes in alkaline media. According to Prytz and Osterud^[21], in the interval Cd:CN 1:4 and Cd:CN 1:20, the $\text{Cd}(\text{CN})_4^{2-}$ complex should prevail. Flengas^[22] suggests that with excess of cyanide all the cadmium is complexed in the $\text{Cd}(\text{CN})_4^{2-}$ form. Ortega and collaborators^[23] suggest that $\text{Cd}(\text{CN})_4^{2-}$ is formed in great excess of cyanide to a solution pH higher than 10. Koivula and co-workers^[24] demonstrates that for a Cd:CN 1:10 system, 95% of cadmium are under the $\text{Cd}(\text{CN})_4^{2-}$ form. In this work, the cadmium cyanide complexes speciation was obtained using the program HYDRA MEDUSA^[25]. Figure 3 shows that at the initial pH and cadmium and cyanide solution concentrations used in this work the predominant cadmium cyanide complex formed is $\text{Cd}(\text{CN})_4^{2-}$, just like in cadmium-plating baths. The other ionic species present in the solutions are free cyanide (CN^-), hydroxide (OH^-) and sodium (Na^+) ions^[17]. In the electro dialysis cell, only sodium ions can pass through the cation-exchange membrane, whereas metal complexes, free cyanide and hydroxide ions are transported through the anion-exchange membrane as it can be observed in figure 2.

Experiments to establish the current density influence on the $\text{Cd}(\text{CN})_4^{2-}$ and CN^- ions removal were performed. TABLE 1 shows results obtained at 10, 15 and 20 mA cm^{-2} current densities.

The results suggest that the percent extraction of the ionic species is higher when higher current densities are applied, even though the current efficiency is lower. It is clear that the lower current density resulted in better current utilization. The CN^- ion removal is higher than the $\text{Cd}(\text{CN})_4^{2-}$ ion. The cadmium cyanide complex is more voluminous than cyanide ion, what indicates that it is more difficult to transport larger ions through the anion-exchange membrane.

Cadmium compound precipitation on cation-exchange membrane

Experiments accomplished with 20 mA cm^{-2} and during 240 minutes of electro dialysis result in 86% $\text{Cd}(\text{CN})_4^{2-}$ and 95% CN^- extraction, as it can be observed in figure 4.

However a cadmium compound precipitation on the cation-exchange membrane disposed between the

Current Research Paper

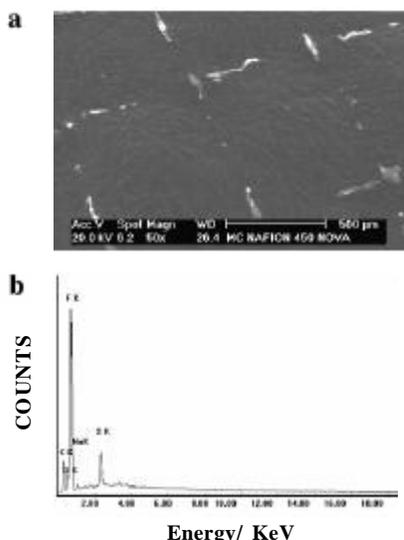


Figure 5: (a) New cation-exchange membrane (NAFION 450) micrograph and (b) respective EDS spectra

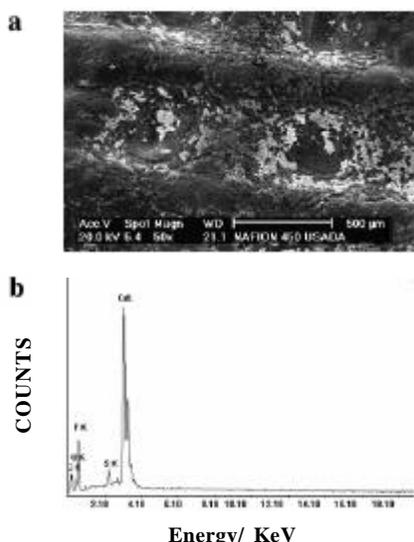


Figure 6: (a) Used cation-exchange membrane (NAFION 450) micrograph and (b) respective EDS spectra

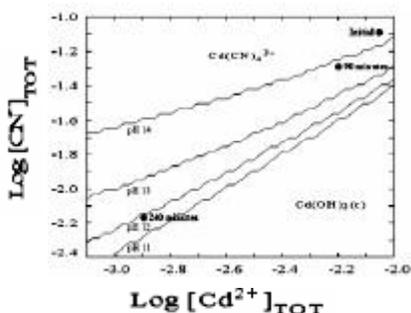


Figure 7: Speciation of cadmium and cyanide ionic species as a function of cadmium and cyanide concentration and the solution pH

cathodic concentrate and the diluate central cell compartments was observed. Such precipitation is not observed up to 90 min of electro dialysis, where 23% $Cd(CN)_4^{2-}$ and 43% CN^- extraction occur. Figures 5a and 6a show micrographs obtained by SEM (Scanning Electron Microscopy) for a cation-exchange membrane before its use (new membrane) and for the cation-exchange membrane used up to 240 min of electro dialysis, respectively. Figures 5b and 6b show the corresponding membranes EDS (Energy Dispersion Spectroscopy) spectra, respectively. From figure 6b it is clear that the precipitate corresponds to a compound containing cadmium. However, a more accurate analysis should be conducted to determine which cadmium compound is formed. This precipitation represents a drawback for the electro dialysis process since the precipitate formation on ion-exchange membranes can reduce the effective membrane area and consequently the process efficiency. Besides, it can cause irreversible membrane damages reducing its life cycle and increasing operational costs

It is well know in electro dialysis that the precipitation on ion-exchange membranes can be a consequence of operating above the limiting current density. In this case water dissociation in H^+ and OH^- ions can occur, what might cause changes in the pH of the boundary layer formed in the membrane/solution interface, leading to a local change in the characteristics of the ionic species present in the solution. Insoluble compounds can be formed and then precipitate on the ion exchange membrane. Previous results have shown that with these membranes and these solutions there is a limiting current density at the cation-exchange membrane at approximately $25 mA cm^{-2}$ [13,26]. Since in this work $20 mA cm^{-2}$ was applied during 240 min for the ions removal, it can be estimated that during this prolonged experimental interval, the system could reach the limiting current density. Figure 7 demonstrates that if pH increases and cadmium and cyanide concentration decrease, insoluble $Cd(OH)_2$ can be formed. $Cd(OH)_2$ might then precipitate on the cation-exchange membrane. By these considerations it can be estimated that the cadmium compound formed and precipitated on the membrane is $Cd(OH)_2$. It is clear that accurate pH measurements should be available near the membrane/solution interface to confirm these

Current Research Paper

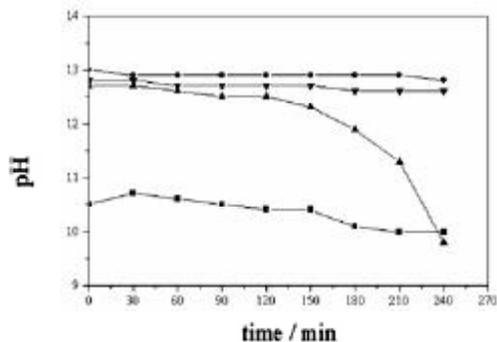


Figure 8: Behavior of the solution pH in the electro dialysis cell compartment during 240 minutes of electro dialysis with a 20mA cm^{-2} current density. (●) Anodic (▲) Central (▼) Cathodic

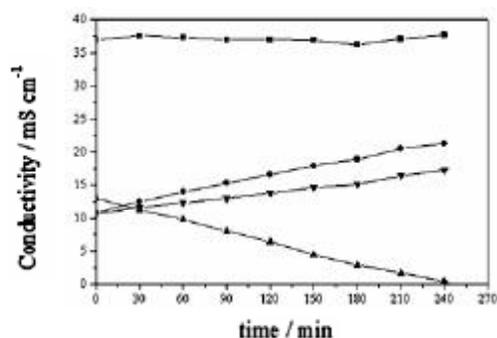


Figure 9: Behavior of the solution conductivity in the electro dialysis cell compartment during 240 minutes of electro dialysis with a 20mA cm^{-2} current density. (●) Anodic (▲) Central (▼) Cathodic

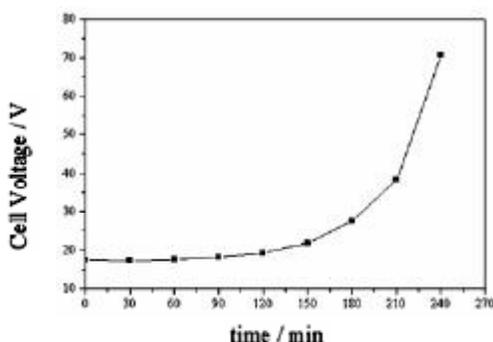


Figure 10: Behavior of the cell voltage during 240 minutes of electro dialysis with a 20mA cm^{-2} current density

hypotheses

Behavior of the pH and the conductivity of the solutions and the cell voltage

During the electro dialysis process with a 20mA cm^{-2} current density the cell voltage (measured between the two platinum electrodes), the pH and the conductivity

of the solutions (measured directly in the solutions reservoirs) were also determined. The determined pH value represents the bulk pH of the solution and not necessarily the pH in the membrane/solution interface. This behavior can be observed in figures 8-10.

Figure 8 shows that there is a decrease on the bulk pH at the diluate central cell compartment. This decrease could be associated to the OH^- consumption that occurs during the formation and precipitation of $\text{Cd}(\text{OH})_2$. The conductivity decrease in the diluate central cell compartment indicates the $\text{Cd}(\text{CN})_4^{2-}$, CN^- , Na^+ and OH^- ions removal (Figure 9). The conductivity increase in the anodic concentrate cell compartment can be attributed to the Na^+ transport from the electrodes compartment and to the $\text{Cd}(\text{CN})_4^{2-}$, CN^- and OH^- transport from the diluate central cell compartment. The conductivity increase in the cathodic concentrate cell compartment can be attributed to the SO_4^{2-} transport from the electrodes compartment and to the Na^+ transport from the diluate central compartment.

The cell voltage increase can be attributed to the decrease in the conductivity of the diluate central cell compartment solution as a consequence of the ionic species removal increasing the solution electrical resistance (Figure 10). Besides, when Figures 8 and 10 are compared, it can be seen that when bulk pH decreases in the diluate central cell compartment the cell voltage increases. This behavior could be all related to a limiting current density at the cation-exchange membrane.

CONCLUSION

The results presented here demonstrate that cadmium and cyanide transport occurs only through the anion-exchange membrane towards the anode, indicating that the ionic species are negatively charged. Cadmium and cyanide percent extraction and current efficiency depend on the applied current density and the total removal of the ionic species is limited by a cadmium compound precipitation on the cation-exchange membrane of the diluate central cell compartment. More accurate experiments should be done to try to avoid the cadmium compound precipitation and to achieve higher ionic species removal. One alternative is the treatment of solutions by electro dialysis in a continuous way or with

successive changes of solution in the diluate central cell compartment.

REFERENCES

- [1] T.J.Butter, L.M.Evison, I.C.Hancock; *Water Research*, **32**, 400-406 (1998).
- [2] Ferhan Cecen, Gul Gursoy; *Journal of Environmental Science and Health*, **A36**, 987 – 998 (2001).
- [3] L.Hartinger; 'Handbook of Effluent Treatment and Recycling for the Metal Finishing Industry', 2nd ed., Finishing Publications: UK, (1994).
- [4] U.B.Ogutveren; E.Toru, S.Koparal; *Water Research*, **33**, 1851-1856 (1999).
- [5] U.B.Ogutveren, E.Toru, S.Koparal; *Water Research*, **33**, 1857-1865 (1999).
- [6] L.J.J.Janssen, L.Koene; *Chem.Eng.J.*, **85**, 137-150 (2002).
- [7] C.T.Riley, M.J.Semmens; *Plat.Surf.Finish*, **22**, 46-52 (1994).
- [8] Zhisong Shen, Binbing Han, S.Ranil; *Desalination*, **195**, 40-50 (2006).
- [9] M.Goel, V.Agrawal, A.K.Kulkarni, S.M.Cramer, W.N.Gill; *J.Membr.Sci.*, **8**, 141-145 (1998).
- [10] V.Natarajan, S.M.Cramer; *Separ.Sci.Technol.*, **35**, 1719-1742 (2002).
- [11] R.Klishenko, B.Kornilovich, R.Chebotaryova, V.Linkov; *Desalination*, **126**, 159-169 (1999).
- [12] N.Sapari, A.Idris, N.H.A.Hamid; *Desalination*, **106**, 419- 427 (1996).
- [13] J.A.S.Tenorio, D.C.R.Espinosa; *Waste Management*, **21**, 637-642 (2001).
- [14] D.R.Rowe, I.M.Abdel-Magid; 'Handbook of Wastewater Reclamation and Reuse', CRC Press: New York, (1995).
- [15] J.D.Genders, N.L.Weinberg; 'Electrochemistry for a Cleaner Environment, Electrosynthesis Company: New York, (1992).
- [16] R.Audinos; *Chem.Eng.Sci.*, **38**, 431-438 (1983).
- [17] M.A.S.Rodrigues, C.Korzenovski; *Journal of Membrane Science*, **279**, 140-147 (2006).
- [18] G.Blum, G.B.Hogaboom; *Principles of Electroplating Andelectroforming*, 3rd ed., MCGraw-Hill: New York, (1949).
- [19] E.Gain, S.Laborie, P.H.Viers, M.Rakib, D.Hartmann, G.Durand; *Desalination*, **149**, 337 (2002).
- [20] M.Tzanetakis, W.M.Taama, K.Scott, R.J.J.Jachuck, R.S.Slade, J.Varcoe; *Sep.Purif. Technol*, **30**, 113-127 (2003).
- [21] Xue-fen Chen, Zu-cheng Wu; *Journal of Zhejiang University Science*, **6**, 543-545 (2005).
- [22] A.Dabrowski, Z.Hubicki; *Chemosphere*, **56**, 91-106 (2004).
- [23] Luciano Marder; Andrea Moura Bernardes; *Separation and Purification Technology*, **37**, 247-255 (2004).
- [24] R.Koivula, J.Lehto, L.Pajo, T.Gale, H.Leinonen; *Hydrometallurgy*, **56**, 93-99 (2000).
- [25] Y.Fernandez, E.Maranon; *Journal of Hazardous Materials*, **2005**, 126,169-175 (2005).
- [26] Xiao Feng, Zucheng Wu; *Separation and Purification Technology*, **57**, 257-263 (2007).