

2014

BioTechnology

An Indian Journal

FULL PAPER

BTAIJ, 10(23), 2014 [14142-14149]

Study on stability of artificial pillar under regenerated mechanical environment

Kang Zhao*, Zhang Junping, Xiaodong Zhao

School of Architectural and Surveying Engineering, Jiangxi University of Science and Technology, Ganzhou 341000, (CHINA)


E-mail: zhaok_666666@163.com

ABSTRACT

In order to ensure that the ore mining stope structure stability, the artificial pillars in one gold mine were designed, their self-stability and effectiveness in supporting overburden rock of goaf were studied based on idea of regeneration of mechanical environment. This paper describes the studies of artificial pillar self-stability respectively in terms of stress changes, plastic zone distribution and displacement changes. The study results demonstrated that the designed artificial pillar can bear the weight of above overburden rock, show good stability itself, effectively prevent the destruction of surrounding rock and overburden rock of goaf and achieve the purpose of mine supporting. The designed artificial pillars can meet the needs of safety operation; however, the real-time stability monitoring should be emphasized at some key positions.

KEYWORDS

Mechanical environment regeneration; Artificial pillar; Stability; Stress; Plastic zone; Displacement.



INTRODUCTION

A great quantity of ore mining will cause stress changes in surrounding rock environment^[1]. In order to fully recover mineral resources, there is need to reclaim the left pillars but necessary measures should be adopted in supporting goaf roof after pillar recovery to prevent catastrophic mine accidents. Deshen Gu proposed an important idea, “regeneration of mining environment,” in mining science^[2-3]. The idea deals with construction of artificial structure to change stress environment in surrounding rocks of goaf after mining to minimize the destruction caused by original stress changes, to reduce the difference between main tresses and to lower the stress dispersion levels in the purpose of improving stability of surrounding rock of goaf. The artificial pillars usually can’t reach desired supporting effect since their supporting capability is affected by some complicated factors such as filling construction process, characteristics of filling material and designed strength, etc^[4-7]. Although some researchers have contributed their efforts and made some achievements in studies of underground support function and effectiveness, most of these studies are concentrated on areas of artificial pillar construction process and field applications, relatively less research work are reported on studies of self-stability and fracture behavior of artificial pillars^[8-13]. It is found that, through literature searching and field investigation, the artificial pillars have replaced original ore pillars in many mines, however, the problems such as the self failure mechanism of artificial pillars have been puzzling the safety operations in many mines.

MODELLING

One gold mine in China was used as a research subject in this study; its ore body was 5m in average thickness; length was 90m; inclination was nearly horizontal; burial depth was 500m. An open-stope mining is used in this mine with natural pillars being replaced by artificial pillars to ensure the stability of surrounding rocks of goaf. The mine is divided into seven mining levels(-390m, -410m, -430m, -460m, -500m, -540m and -580m.), currently -410m level mining has been completed, -430m level is under mining and -460m level is under development.

Influenced by surface environment, the main shaft is located in the theoretical movement belt area, so it is very critical to study the influences on above overburden rocks and surface movement during mining of -430m and -460m levels. Therefore, it is necessary to study the self-stability of artificial pillars. The model is built in according to mine geological conditions, it has a bottom buried depth of 790m, a number of 124614 nodes and 117096 units, the physical and mechanical parameters of model are shown in TABLE 1. The research is mainly concentrated on self-stability of artificial pillars during mining process of -430m and -460 levels. The dimensions of mining room and pillar are shown in TABLE 2 and their layout in Figure 1.

A gradient mode is adopted for meshing with more dense and even grids used in research areas. The model uses displacement boundary conditions: using the roll around support($u_x=0, u_y=0$),bottom fixed ($u_x=0, u_y=0, u_z=0$), the upper boundary is the gravity stress of overburden rock $\sigma_{zz}=10.92\text{MPa}$, the horizontal stress in the direction of ore body tendency is 1.25 times that of vertical stress ($\sigma_x=1.25\sigma_z$), the horizontal stress along the ore body is 0.75 times that of vertical stress ($\sigma_x=0.75\sigma_z$) along the run of ore body. The Mohr-Coulomb strain softening standards are used in calculations. The model is shown in Figure 2.

TABLE 1 : Mechanical parameters of rock mass

Constituent	Density (kN/m^3)	Elastic modulus (MPa)	Cohesion (MPa)	Friction angle($^\circ$)	Poisson’s ratio	Tensile strength(MPa)
Surrounding rock	28	60000	15	45	0.2	7.5
Ore body	27.1	65000	15	42	0.19	7.5
Artificial pillar	21	230	0.171	35	0.25	0.01

TABLE 2 : Parameter design for ore block structure of -430m and -460m levels

Mid section	Ore block structure parameter			
	Number of pillars per section	Pillar width (m)	Number of rooms per section	Room width (m)
-430m	4	6.6	5	11.7
-460m	3	5.8	4	11.9

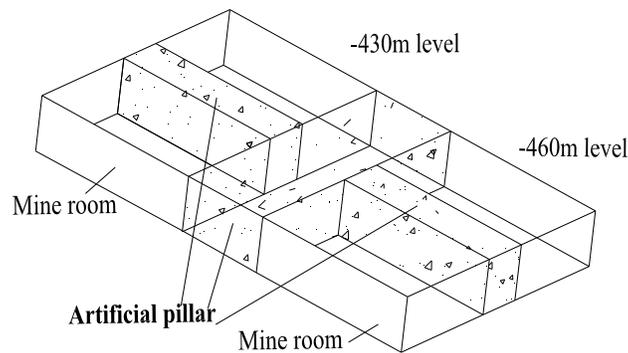


Figure 1 : Layouts of mine room and artificial pillar

RESULTS AND DISCUSSIONS

Stress changing process of artificial pillar itself

The stress has great changes in the mining process, especially concentrating on the areas of surrounding rocks outside both ends of mine room, the stress value reaches

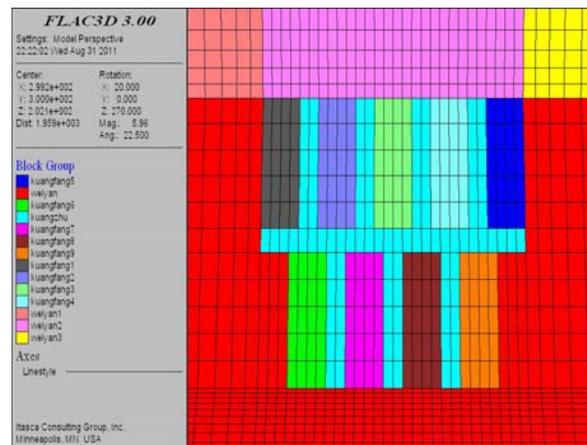


Figure 2 : Model of mine room and artificial pillar

61.03MPa at lower surrounding rocks outside mine room (Figure 3). Although this stress is less than the maximum compression strength of 75 MPa of surrounding rocks, safety monitoring should be emphasized and reinforcement measures adopted to ensure the safety. It is shown in maximum principle stress diagram that the stress of artificial pillar is relatively stable and there is no stress concentration phenomena, the applied stress is less than its compression strength. It is known from the minimum main stress diagram that the tensile stress is very small, not even existing; considering the compression-resisting and non-tension-resisting characteristics of rock material, the artificial pillar is in a stable state. While looking at whole minimum stress diagram, it is shown that the maximum tensile stress are located on the mine room roof at -430m mining level and in the middle of floor of two mining levels of goaf. The closer is the mine room to middle area of goaf, the higher the tensile stress value, the maximum tensile stress reaching 3.54 MPa which is still much lower than the tensile strength 7.5 MPa of surrounding rocks and thus surrounding rocks destruction will not occur which accounts for that the designed artificial pillars can meet supporting requirements. All material destruction starts from plastic zones occurred in the material, there is no plastic destruction zones appeared in artificial pillar itself after completion of mining, only small plastic zones appeared during the mining process of two levels (Figure 4). After the mining operation of two mining levels, the artificial pillars are in stable state of stress, this shows that the designed artificial structure parameters can effectively prevent the formation and destruction of plastic zones in overburden rocks in the goaf. It is shown in stress diagram and plastic zone distribution diagram of artificial pillars that the applied compression stress or tensile stress is less than its instability and failure strength, which results no fracture and instability of overburden rocks and causes no failure of artificial pillar itself. The plastic zone distribution diagram of mine room and surrounding rocks can also reflect good supporting of artificial pillars and stable state of the stope structure supported by artificial pillars.

Analysis of artificial pillar displacement change

In the mining process of two mine levels, the stress environment variation have led to changes of corresponding outside load exerting on the artificial

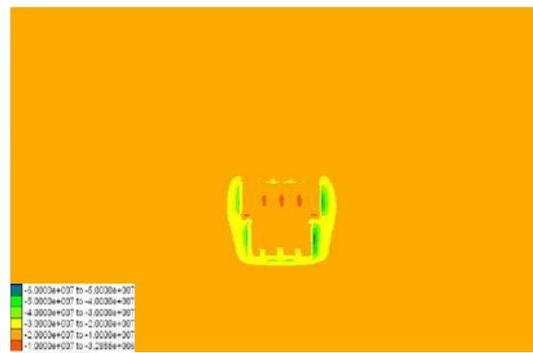


Figure 3 : Contour map of maximum principal stress

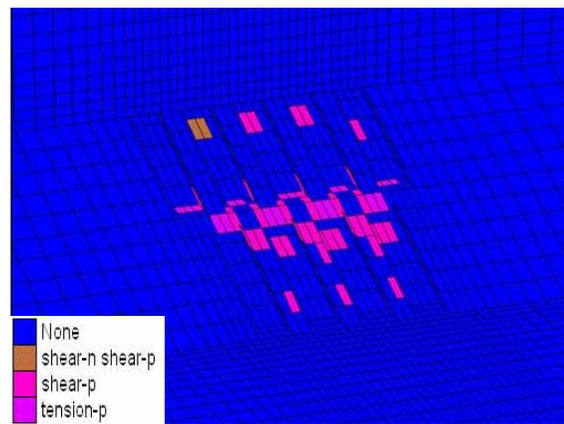


Figure 4 : Plastic zone distribution in pillars

Pillars. The direct result of this load variability is the changes of pillar shape, i.e. displacement occurring in vertical direction. The magnitude of displacement is one important parameter in determination of pillar stability. In order to study the artificial pillar support effect and its stable situation, we set up No.1~5 displacement monitoring points at surrounding rocks on top of mine room and No.6~10 displacement points in each middle section of mine room roof at -430 m mining level, No.11~14 displacement points on top of artificial pillars and No.15~18 displacement points in the middle section of each mine room at -460m mining level (Figure 5).

As shown in Figure 6 that there is displacement changes occurring in surrounding rocks on top of mine room at -430 mining level after completion of two mining levels with a maximum displacement of 3.17mm at No.3 monitoring point and a minimum displacement of 2.52mm at No.5 monitoring point. The displacement change data explains that the supported surrounding rocks are in a stable state and there is very small displacement change. When -460m level had been mined out, the maximum displacement settlement, 8.02mm, occurred at No.8 monitoring point (Figure 7), and relatively small displacement settlement, about 4.86mm, on the roof of mine rooms that are most close to the boundary at both ends of the goaf. Through comparison of displacement changes and analysis of plastic zone distribution diagram, it is deduced that, although the settlement in the goaf roof is relatively higher, the roof stability is not significantly affected.

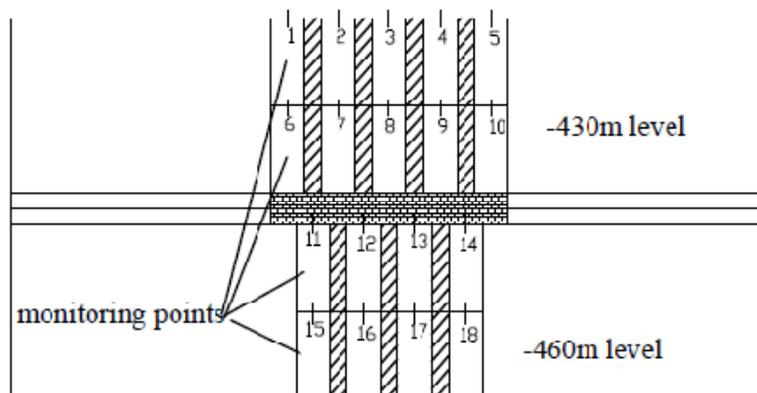


Figure 5 : Different stope structure displacement monitoring point arrangement plan

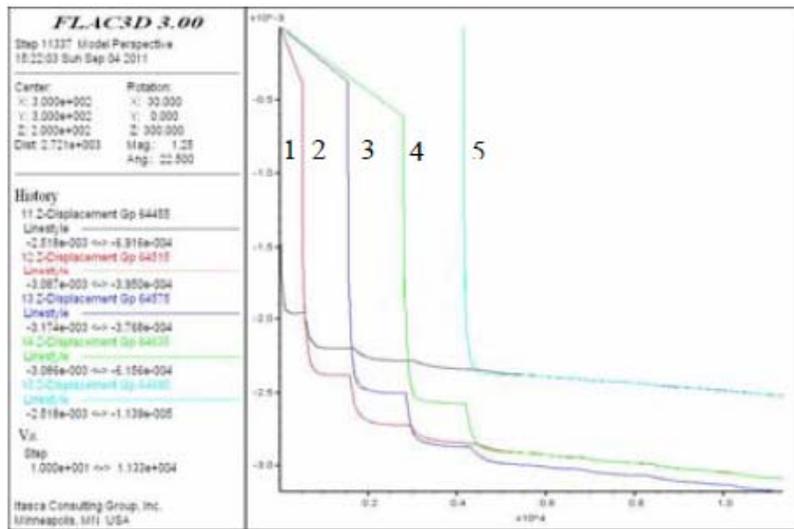


Figure 6 : Displacement change at No.1~5 monitoring points

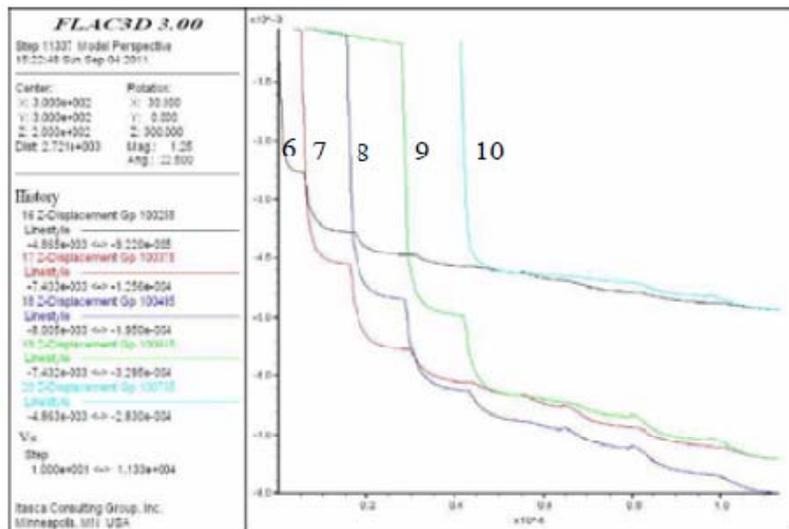


Figure 7 : Displacement change at No.6~10 monitoring points

From No.11~14 monitoring point displacement diagram (Figure 8), it is known that vertical displacement of the artificial pillar (beam) is within a range of 3.5 to 3.7 mm. The simulation shows that the cementation strength between the artificial pillar and surrounding rocks is in sufficient, i.e. showing unsatisfactory roof-contacting effect, this kind of phenomenon fits well with actual field situations. Although there is instantaneous settlement displacement happening in artificial pillar during mining process, the displacement finally converges to about 3.5mm, which will not affect the final stability of surrounding rocks but it should be emphasized to have real-time displacement monitoring of artificial pillar during mining. As shown in Figure 9, a relatively large goaf roof displacement settlement, about 7.76mm, and a minimum value of 5.40mm occur at monitoring points No.16 and No.17 after mining of -460 m mining level. In comparison with the maximum displacement of 8.02mm in goaf roof at -430m mining level, we can infer that there is close interrelationship between the goaf roof displacement settlement and mining level span, the wider span will cause a larger displacement in goaf roof (the span is 85m at -430 mining level and 65m at -460m mining level).

In order to compare the relationship between field measurement and numerical simulation at different level, the subsidence of the goaf roof was measured using a multiple point displacement meter (Figure 10) with the observation stations No. 6-10 and No. 15-18 in mine room roof at the mining level of -430 m and -460m, respectively (Figure 5). Figure 11 shows the result of the comparison, from which we can see the same subsidence regularity for the field measurements at different mining levels. The subsidence is higher near the middle of the stope while lower around the goaf. The maximum subsidence about 7.2mm, is located at goaf roof at -430m mining level, close to the numerical simulation. The maximum subsidence about 6.1mm in goaf roof at mining level of -460m, is very close to the maximum of field measurements. By comparing the two different settlement curves, due to larger span for goaf at mining level of -430 m, the subsidence is higher in the goaf roof, resulting in the instability of overlying strata.

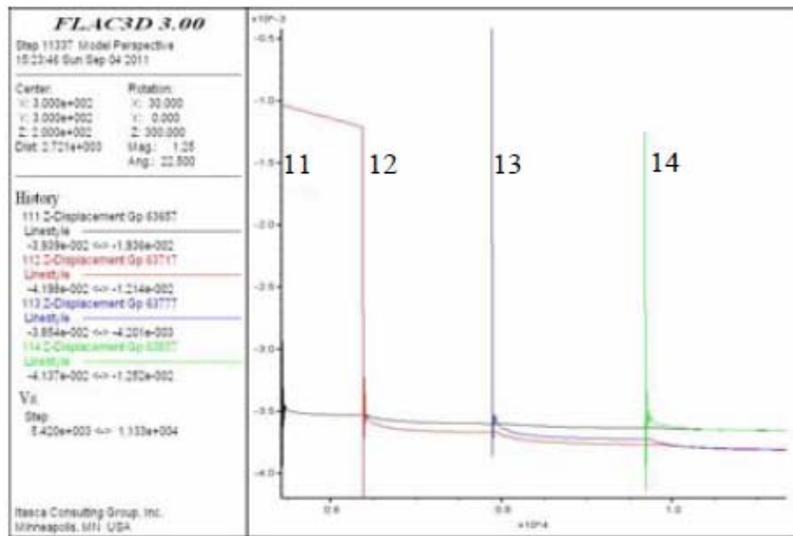


Figure 8 : Displacement change at No.11~14 monitoring points

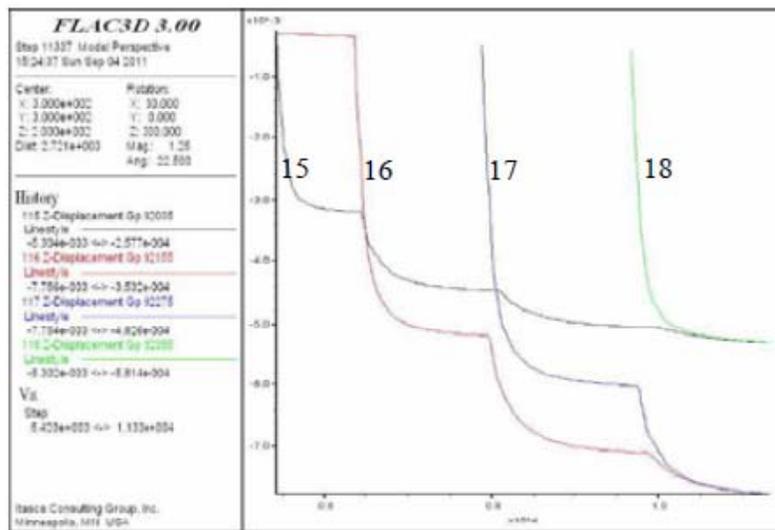


Figure 9 : Displacement change at No.15~18 monitoring points



Figure 10 : Field test scene of multiple point displacement meter

Overall, the pillar displacement deformation of artificial pillar is small and roof deformation of goaf being supported is also in a safe range, and the deformation is in consistent with above mentioned plastic zones (Figure 4), all kinds of structures in the stope are stable, instability and failure will not occur. It demonstrates that the stability of the mine stope structure supported by artificial pillars and self-stability of pillar can meet the requirement of safe production in mines.

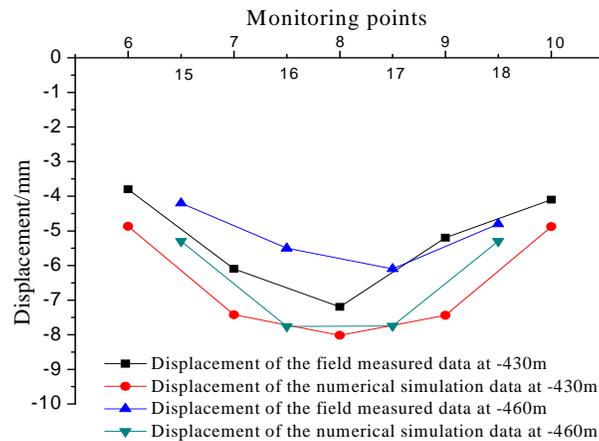


Figure 11 : Comparison of displacement of the field measured and the numerical simulation data at different level

CONCLUSION

(1) In mining process, the artificial pillar is in a very stable state itself due to the small values of applying compressive and tensile stress, which is far less than the corresponding compression and tension strength. In consideration of compression-resisting and non-tension-resisting characteristics of rock material, the applied tensile stress conditions are especially studied in stope structures, we found a maximum tensile stress of 3.54 MPa in surrounding rocks, this stress is much less than the tension strength 7.5 MPa, therefore the destruction will not occur in surrounding rocks. In terms of stress changes in other structure of stope, it is also shown that the designed artificial pillars had demonstrated good supporting effect, the stope structure is in a stable state can meet supporting requirements.

(2) Based on analysis of plastic zone distribution in stope structure, it is found that there is plastic destruction area occurring in artificial pillars, even there are some plastic zones during mining process of two mining levels. However, the artificial pillars are in stable stress state after completion of mining of two mining levels, it illustrates that the designed structure parameters of artificial pillars can effectively prevent the formation and destruction of plastic zones in overburden rocks in the goaf.

(3) Based on simulation research, there is instantaneous settlement displacement happening in artificial pillar during mining process due to low artificial pillar-surrounding rock cementation strength and weak roof-contacting effect, this kind of phenomenon fits well with actual field situations of the mine. However, the displacement finally converges to about 3.5mm, which will not affect the final stability of surrounding rocks. The real-time displacement monitoring of artificial pillar during mining should be emphasized.

(4) According to the comparison of the field measured subsidence for the goaf roof at different mining levels, field measurements are consistent with the simulations. The larger span of goaf the higher of the subsidence. The subsidence at the middle of goaf is higher than that at the goaf surrounding rocks.

ACKNOWLEDGMENT

The authors gratefully acknowledge the National Natural Science Foundation of China (Grant 51364012, 51304083), Science and Technology Program of Jiangxi Province(20132BBG70106), Jiangxi Province Science Foundation for Youths(20142BAB216020), Natural science foundation of Jiangxi University of Science and Technology (NSFJ2014-K02) .

REFERENCES

- [1] H.Yan, J.X.Zhang, Z.W.Ding, Y.L.Huang; Surrounding rock deformation mechanism of roadways with extra-thick coal seam, *Disaster Advances*, **6(S6)**, 226-233 (2013).
- [2] X.B.Li, J.R.Yao, F.Q.Gong; Dynamic problems in deep exploitation of hard rock metal mines, *The Chinese Journal of Nonferrous Metals*, (in Chinese), **21(10)**, 2551-2563 (2011)
- [3] J.J.Hu, T.Lei, K.P.Zhou, Q.F.Chen; Time-varying optimization study of mining sequence based on reconstructed mining environment, *Rock and Soil Mechanics*, (in Chinese), **32(8)**, 2517-2522 (2011).
- [4] O.V.Ovcharenko, I.I.Ainbinder, Shilin K.Yu, N.P.Kramskov; Geomechanical substantiation of the parameters for underground mining of "Mir" Kimberlite Pipe, *Journal of Mining Science*, **38(6)**, 528-533 (2002).
- [5] I.Aglyukov Kh; Mining of the protective pillars using a packed fill, *Journal of Mining Science*, **40(3)**, 292-297 (2004).
- [6] M.Monjezi, M.H.Seyed, Khandelwal Manoj; Superiority of neural networks for pillar stress prediction in bord and pillar method, *Arabian Journal of Geosciences*, **4(5-6)**, 845-853 (2011).

- [7] A.Mortazavia, F.P.Hassanib, M.Shabania; A numerical investigation of rock pillar failure mechanism in underground openings, *Computers and Geotechnics*, **36(5)**, 691-697 (2009).
- [8] K.P.Zhou KP, T.Lei, J.H.Hu, X.Y.Chen; Strength determination of underground large artificial pillar based on microscopic damage mechanics, *Disaster Advances*, **6(13)**, 357-363 (2014).
- [9] K.Zhao; Study of overburden movement mechanism and prevention in jiaochong gold mine[PHD. Thesis] [Dissertation], Beijing: University of Science and Technology Beijing, (in Chinese), (2012).
- [10] J.Deng, Z.Q.Yue, L.G.Tham, H.H.Zhu; Pillar design by combining finite element methods, Neural networks and reliability: a case study of the Feng Huangshan copper mine, China, *International Journal of Rock Mechanics and Mining Sciences*, (in Chinese), **40(4)**, 585-599 (2003).
- [11] J.Zhou, X.B.Li, X.Z.Shi, W.We, B.B.Wu; Predicting pillar stability for underground mine using Fisher discriminant analysis and SVM methods, *Transactions of Nonferrous Metals Society of China*, (in Chinese) **21**, 2734-2743 (2011).
- [12] A.S.Tawadrous, P.D.Katsabanis; Prediction of surface crown pillar stability using artificial neural networks, *Int.Journal for Numerical and Analytical Methods in Geomechanics*, **31(7)**, 917-931 (2007).
- [13] X.J.Wang, X.Feng, T.B.Yang, K.Zhao, K.Zhao; Reasonable width calculation and analysis of artificial pillar in deep mining, *Journal of Mining & Safety Engineering*, (in Chinese) **29(1)**, 54-59 (2012).