



TAMARINDUS INDICA SEEDS AS A NATURAL ION EXCHANGER FOR REMOVAL OF IRON (III)

P. N. KAMBLE, H. R. AHER, S. J. KOKATE and S. R. KUCHEKAR*

P. G. Department of Analytical Chemistry, P. V. P. College, Pravaranagar,
At/PO – LONI (KD) – 413713 (M.S.), Tal. Rahata, Dist. Ahmednagar, INDIA

ABSTRACT

The new selective, sensitive and rapid method was developed for removal of iron from aqueous solution. The seeds were dried and pulverized to 200 mesh. This powder was treated with 39% formaldehyde and 0.2 N sulphuric acid. This treated powder of *tamarindus indica* seeds was tested for absorption efficiency. The absorption study was carried out with equilibration of 1.0 g of natural resin at different time intervals. The removal of iron (III) from standard solutions without adjusting the pH and also after adjusting pH at 6.0 was carried out. 1.0 g of natural resin removes up to 99.0% iron (III) from its solutions.

Key words: *Tamarindus indicas* seeds, Natural resin, Removal, Iron (III).

INTRODUCTION

Iron is the most abundant element in earth crust, is the least expensive and most useful. Sufficient iron is essential in the diet of human and animals for the growth of tissues. Pure iron is required in large amounts in metal industries. The industrial waste water and municipal waste water with this toxic metal ion in the environment is an important matter. The discharge of industrial waste water containing heavy metals is toxic for the life of aquatic organism and it makes water supplies undesirable for drinking also. As this material is accumulated, this metal enters from the environment into the biological systems. and causes serious diseases like cancer; kidney failure, brain tumor, siderosis. Many more diseases are caused by heavy metal pollution. All over world, industries are forced to lower down (to acceptable levels) the contents of heavy metal in water and industrial waste water. The ion exchange method is a convenient method for the removal of heavy metal. The rapid industrialization, which causes the problem of industrial effluents, has grown significantly and majority of these release large volumes of effluent or waste water. This uncontrolled

* Author for correspondence; E-mail: shashi17@gmail.com

industrialization has ignored environmental protection at a global level. As industrial effluent varies in nature from industry to industry and the problem gets aggravated as no standard treatment can be carried out by these industries themselves. Effluent is generally discharged into water resources either untreated or inadequately treated and create problem of water pollution¹⁻³. The tremendous increase in use of heavy metals has inevitably resulted in increased flow of metallic substances in aquatic environment. The metals are of special concern, because of their persistence. The industrial waste constitutes the major source of various kinds of toxic metals, which are significantly toxic to human being and biological environment. They include the heavy metals like chromium (VI), copper (II), lead (II), mercury (II), manganese (II), cadmium (II), nickel (II), zinc (II), iron (II) etc.⁴ The removal of heavy metal from waste water is essential due to their toxicity. The main source of water contamination with chromium ions are industrial waste water from the surface metal treatment plants and from tanneries¹. The release of large quantities of heavy metals into the natural environment has resulted in a number of environmental problems. The main manmade pathway through which heavy metals enter into environment is via waste water from industrial processes. Most of the industries do not have satisfactory waste disposal system or treatment plants⁵. The ion exchange and adsorption are common operations used for the waste water treatment. In ion exchange processes, zeolites and resins are used for the removal of heavy metals such as Pb^{2+} , Cr^{3+} , Fe^{3+} and Cu^{2+} and ammonia⁵. The electroplating industries release the huge amounts of heavy metals into the environment. In our laboratory, we have done work on removal of heavy metals by using water hyacinth as natural tool⁶ and *casuarinas equisetifolia* bark as a natural ion exchanger for removal of heavy metals from industrial effluents⁷. Present work is the extension of our previous work developed for removal of iron (III) from solutions using *tamarindus indica* seeds powder as a natural exchanger.

EXPERIMENTAL

Apparatus: A spectrophotometer 'Elico Model SL-159' with 10 mm path length quartz cells and pH meter 'Control Hydrodynamic' were used for absorbance and pH measurements.

Reagents: All chemicals used were of analytical reagent grade. Hydrochloric acid, sulphuric acid and formaldehyde (Qualigens and fine chemicals. Pvt. Ltd., India). The standard metal ion solution of ferric ammonium chloride (Loba. Chem. Laboratories and fine chemicals, India) were prepared by dissolving respective salts with dilute hydrochloric acid.

Botanical classification of tamarindus indica

Kingdom: Plantae	Sub Family: Caesalpinioideae
Division: Magnoliophyta	Tribe: Detarieae
Class: Magnoliopsida	Genus: Tamarindus
Order: Fabales	Species: Indica
Family: Fabaceae	

Materials and methods

The 5 Kg seeds of *tamarindus indica* was pulverized after drying in sun light in open air for one week. Small size pieces of dried seed were grinded for 200 mesh powder. This powder was chemically treated with 39% formaldehyde and 0.2 N sulphuric acid at 80°C for half an hour. After cooling and washing with doubled distilled water, it was allowed to dry overnight in open air. Dried powder was used for adsorption study.

Scheme: Seed powder → formaldehyde (700 mL) → 0.2 N sulphuric acid (10 mL) → heat for half hour at 80°C → substrate was cooled → substrate was filtered → washed with doubled distilled water → dried in open air → this substrate was used as insoluble ion exchange resin.

Phenol-formaldehyde resin: This resin is also called a Navioc resin. The chemical reaction occurs during formation of resin is as follows (Fig. 1).

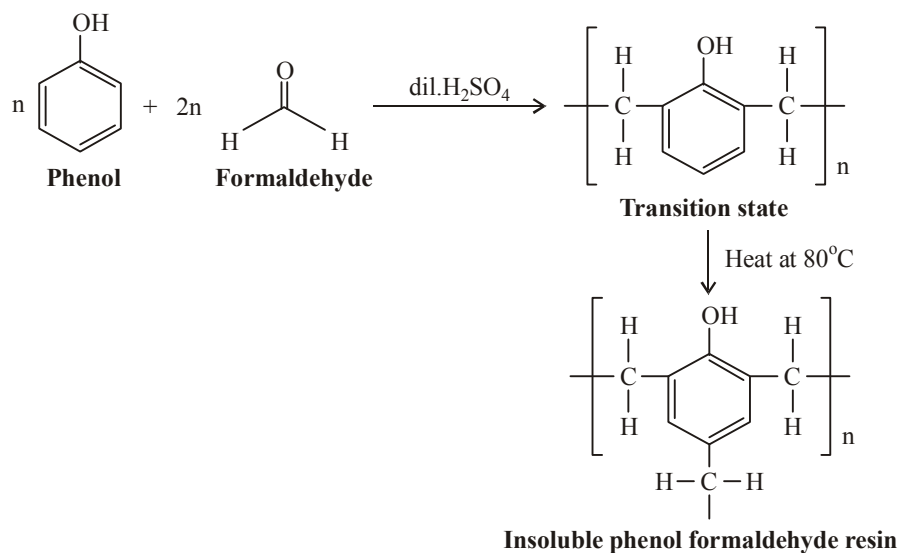


Fig. 1: Chemical reaction for formation of resin

Seed contains polyphenols; when these are treated with formaldehyde and H_2SO_4 , they form phenol-formaldehyde resin, which acts as an ion exchanger⁹.

General procedure: 1.0 g of resin was transferred in each round bottom flask numbered 1 to 5. 25 mL of 20, 40, 60, 80, and 100 ppm iron (III) solutions was added in each flask and shaken for 1 hr, 2 hr and 3 hr. After shaking for respective time intervals the flask on shaker, solution was separated filtration. Then the concentrations of iron (III) was determined by spectrophotometric method⁹.

RESULTS AND DISCUSSION

Increase in concentrations of iron (III) removing efficiency decreases due to insufficient resin available for extractions. On increasing contact time, the efficiency of adsorption decreases while at constant pH, it remains constant. The results are reported in Table 1 for the removal efficiency of iron (III) by using natural resin and at pH 6.0.

Table 1: Effect of time interval and adjustment of pH on removal of iron before and after treatment

pH	Hours	Concentration before treatment (ppm)	Concentration after treatment (ppm)	%, Removal
-	1	20	0.15	99.25
		40	0.15	98.75
		60	0.80	98.66
		80	2.35	97.06
		100	6.35	93.75
-	2	20	0.40	98.00
		40	2.45	93.87
		60	2.60	95.66
		80	3.90	95.12
		100	5.10	94.90
-	3	20	1.40	93.00
		40	2.80	93.00
		60	3.95	93.41
		80	7.65	90.43
		100	8.35	91.65

Cont...

pH	Hours	Concentration before treatment (ppm)	Concentration after treatment (ppm)	%, Removal
6.0	1.0	20	0.15	99.25
		40	0.60	98.50
		60	0.65	98.91
		80	0.70	99.12
		100	0.75	99.25
6.0	2.0	20	0.05	99.75
		40	0.15	99.62
		60	0.35	99.41
		80	0.60	99.25
		100	0.75	99.35
6.0	3.0	20	0.05	99.75
		40	0.15	99.62
		60	0.20	99.66
		80	0.25	99.68
		100	0.40	99.60

CONCLUSION

This technique, with proper physical and chemical treatment to the *tamarindus indica* seeds powder, provides an efficient, economic and ecofriendly technique for removal of iron from waste waters. Raw material used for the preparation of substrate is widely available and inexpensive also. This method well help to solve water pollution problem.

ACKNOWLEDGEMENT

The authors are thankful to UGC, New Delhi for providing financial assistance. We are also thankful to Management, Pravara Rural Education Society and Principal, P. V. P. College, Pravaranagar for providing necessary facilities in the department.

REFERENCES

1. Z. Dabrowski, P. Hubicki, Podkoscienly and E. Robens, J. Chemosphere, **56**, 91 (2004).

2. S. Kocaoba and G. J. Akcin, *Desalination*, **180**, 151 (2005).
3. B. K. Sharma, *Industrial Chemistry*, Goel Publication House, Merrut, 14th Ed. (2004).
4. M. Ajmol, A. A. Noimohi and A Ahmed, *Acute Toxicity of Heavy Metal of Electroplating Industry*, Madras Production (1984).
5. V. J. Glezakis, M. D. Loizidou and H. P. Grigoropoulou, *Short –Cut Design of Ion Exchange and Adsorption of Fixed Bed Operations for Wastewater Treatment*, 8th International Conference on Environmental Science and Technology. Lemnos Island, Greece 8-10 September 2003.
6. U. S. Shetty, K. D. Sonwane and S. R. Kuchekar, *Annali Di Chimica*, **95**, 721 (2005).
7. P. N. Kamble, N. V. Apshingekar, H. R. Aher, V. B. Gaikwad, S. R. Kuchekar, *Environmental Science: An Indian Journal* (Accepted) (2009).
8. F. Mazahar, K. Sandeep and Z. Ahmed and U. Sanjay, *Asian. J. Chem.*, **14**, 95 (2002).
9. E. B. Sandell, *Colorimetric Determination of Traces of Metals*, 3rd Ed., Interscience Publishers, INC, New York (1965).

Revised : 20.10.2009

Accepted : 24.10.2009