



Trade Science Inc.

January 2008

Volume 7 Issue 4

# Analytical CHEMISTRY

An Indian Journal

Full Paper

ACAJI, 7(4) 2008 [223-229]

## Solid phase extraction of trace copper(II) using octadecyl silica membrane disks modified bis(2-hydroxyphenylamino)glyoxime

Ali Moghimi<sup>1\*</sup>, Shahryar Ghammamy<sup>2</sup>

<sup>1</sup>Department of Chemistry, Varamin Campus Islamic Azad University, Varamin, (IRAN)

<sup>2</sup>Department of Chemistry, International of Imam Khomainsi University, Qazvin, (IRAN)

E-mail: kamran9537@yahoo.com

Received: 12<sup>th</sup> March, 2007 ; Accepted: 17<sup>th</sup> March, 2007

### ABSTRACT

A simple and reproducible method for the rapid extraction and determination of trace amounts of copper(II) ions using octadecyl-bonded silica membrane disks modified by bis(2-hydroxyphenylamino)glyoxime (BHPG) and atomic absorption spectrometry is presented. The method is based on complex formation on the surface of the ENVI-18 DISK<sup>TM</sup> disks followed by stripping of the retained species by minimum amounts of appropriate organic solvents. The elution is efficient and quantitative. The effect of potential interfering ions, pH, ligand amount, stripping solvent, and sample flow rate were also investigated. Under the optimal experimental conditions, the break-through volume was found to be about 1000 mL providing a preconcentration factor of 500. The maximum capacity of the disks was found to be  $389 \pm 4 \mu\text{g}$  for  $\text{Cu}^{+2}$ . The limit of detection of the proposed method is 5 ng per 1000 mL. The method was applied to the extraction and recovery of copper in different water samples.

© 2008 Trade Science Inc. - INDIA

### KEYWORDS

Copper(II);  
SPE;  
Octadecyl silica disks;  
AAS;  
Bis(2-hydroxyphenylamino)  
glyoxime (BHPG).

### INTRODUCTION

Copper at trace concentrations acts as both a micronutrient and a toxicant in marine and fresh water systems<sup>[1-8]</sup>. This element is needed by plants at only very low levels and is toxic at higher levels. At these levels, copper can bind to the cell membrane and hinder the transport process through the cell wall. Copper at nearly  $40 \text{ ng mL}^{-1}$  is required for normal metabolism of many living organisms<sup>[9,10]</sup>. On the other hand, copper is an important element in many industries. Thus, the development of new methods for selective separation, concentration and determination of it in sub-micro levels in different industrial, medicinal and environmental samples is of continuing interest. The determination of copper is

usually carried out by flame and graphite furnace atomic absorption spectrometry (AAS)<sup>[11,12]</sup> as well as spectrometric methods<sup>[13,14]</sup>. However, due to the presence of copper in medicinal and environmental samples at low levels, its separation from other elements presents and also the use of a preconcentration step prior to its determination is usually necessary.

Different methods, especially liquid-liquid extraction of copper in the presence of various classical<sup>[15-19]</sup> and macrocyclic<sup>[20,21]</sup> co-extractant ligands has attracted considerable attention. However, the use of classical extraction methods for this purpose is usually time-consuming, labor-intensive and requires large amounts of high purity solvents for extraction. Nevertheless, several other techniques for the preconcentration and sepa-

## Full Paper

ration of copper have been proposed including liquid chromatography<sup>[22]</sup> supercritical fluid extraction<sup>[23]</sup>, flotation<sup>[24]</sup>, aggregate film formation<sup>[25]</sup>, liquid membrane<sup>[26]</sup>, column adsorption of pyrocatechol violet-copper complexes on activated carbon<sup>[27]</sup>, ion pairing<sup>[28,29]</sup>, preconcentration with yeast<sup>[30]</sup>, and solid phase extraction using C18 cartridges and disks<sup>[31-33,56]</sup>.

Solid phase extraction (SPE) or liquid-solid extraction is popular and growing techniques that are used to sample preparation for analysis. It is an attractive alternative for classical liquid-liquid extraction methods that reduce solvent usage and exposure, disposal costs and extraction time for sample separation and concentration purposed<sup>[34-36]</sup>. In recent years, the octadecyl-bonded silica SPE disks have been utilized for the extraction and separation of different organic compounds from environmental matrices<sup>[37-40]</sup>. Moreover, the SPE disks modified by suitable ligands are successfully used for selective extraction and concentration of metal ions<sup>[41,42]</sup>.

In a recent series of papers,<sup>[43-45]</sup> we have described the application of metal-DNA conjugates to nucleic acid sequence determination with catalytic signal amplification; the assay relies on the esterase activity of a DNA-linked Cu complex. For optimization of the system and exploration of structure- activity relationships, a sensitive probe would be useful, which allows straightforward detection of esterase activity of ligated Cu<sup>+2</sup> in low concentration. The aim of this work was the development of a rapid, efficient and highly sensitive method for selective extraction and concentration of ultra trace amounts of Cu<sup>+2</sup> ions from aqueous media using octadecyl silica membrane disks modified by bis(2-hydroxyphenylamino) glyoxime and AAS determination.

## EXPERIMENTAL

### Reagents

All acids were of the highest purity available from Merck and were used as received. Methanol and chloroform were of HPLC grade from Merck. Analytical grade nitrate salts of lithium, sodium, potassium, magnesium, calcium, strontium, barium, zinc, cadmium, lead,

**TABLE 1 : The operational conditions of flame for determination of copper**

Slit width	0.7 nm
Operation current of HI-HCl	15 mA
Resonance fine	324.8nm
Type of background correction	Deuterium lamp
Type of flame	Air/acetylene
Air flow	7.0 mL.min-1
Acetylene flow	1.7 mL.min-1

nickel, cobalt(II), and copper(II) were of the highest purity. Ultra pure organic solvents were obtained from E.Merck, Darmstat, Germany, and high purity double distilled deionized water was used throughout the experiments. bis(2-hydroxyphenylamino) glyoxime was obtained from E.Merck, Darmstat, Germany.

The stock standard solution of Cu<sup>+2</sup> was prepared by dissolving 0.1000g of the copper powder in 10mL concentrated nitric acid and diluted to 1000mL with water in a calibrated flask. Working solutions were prepared by appropriate dilution of the stock solution.

### Apparatus

Determination of Cu<sup>+2</sup> contents in working samples were carried out by a Varian spectra A.200 model atomic absorption spectrometer equipped with a high intensity hollow cathode lamp(HI-HCl) according to the recommendations of the manufacturers. These characteristics are tabulated in TABLE 1.

Solid phase extractions were carried out by glassy membrane disks, ENVI-18DISKTM 47mm diameter×0.6mm thickness containing octadecyl silica bonded phase (30µm particles, 70Å pore size) obtained from Supelco in conjunction with a standard Millipore 47mm filtration apparatus equipped with a vacuum pump. The pH measurements were carried out by an ATC pH meter (EDT instruments, GP 353).

### Sample extraction

Extraction were performed with glassy membrane disks, ENVI-18 DISKTM 47mm diameter ×0.6mm thickness containing octadecyl silica bonded phase (30µm particles, 70Å pore size) from Supelco. The disks were used in conjunctions with a standard Millipore 47mm filtration apparatus connected to water aspirator<sup>[46]</sup>.

### 1. Sample treatment

The water samples were filtered through 45µm ny-

ion filters. Sampling vessels were polyethylene bottles soaked in 1 mol.L<sup>-1</sup> HNO<sub>3</sub> overnight and rinsed twice with deionized water. The analysis must be done within 2 days of sample collection to limit the risk of interconversion of copper(II). Then, 5mL of methanol was added to a 90mL portion of each before analysis. The surface of the ENVI-18 DISK™ disks is not modified with BHPG and therefore could not retain Cu<sup>+2</sup> ions properly. Instead, 10 mg of BHPG was dissolved in an appropriate volume of an organic solvent (5mL) miscible with water. The most suitable solvent under the experimental conditions was acetone. The BHPG solution was added to aqueous solution of Cu<sup>+2</sup> and the mixture was stirred gently.

## 2. Disk cleaning and conditioning

A disk was placed in the apparatus and was washed with 10mL of methanol to remove all contaminants arising from the manufacturing process and the environment. Then, the disk was dried by passing air through it for several minutes. To insure optimal extraction of the analytes of interest, the disk was again washed with 10mL of methanol, immediately followed by 10mL of water, without letting the surface of the disk dry. This step pre-wets the disk surface prior to extraction. Improper performance of this step causes slow flow rate and poor analyte recoveries. It is important to avoid any air contact with the surface of the disk before the addition of the sample.

## 3. Sample addition

After complete homogenization, accurate volumes of the sample solutions (100mL portions) were transferred to the top reservoir of the disk apparatus. At the same time, the solution was drawn through the disk by applying a mild vacuum. Application of vacuum was continued until the disk was completely dry (about 5 minute).

## 4. Analyte elution

In order to elute the analyte selectively, exactly 5mL of acidified solvents 0.1M HCl in methanol was passed through the disk and collected into a 5.0mL volumetric flask under the extraction funnel. It was found that ultra pure alcoholic organic solvents were the best eluting agents. The concentration of copper(II) in the eluates were then determined by FAAS using an external calibration graph.

TABLE 2 : The effect of presence of BHPG on extraction percent of copper(II)<sup>a</sup>

BHPG	pH	Extraction percent of copper(II)
Absence	2-6	0.03(7.0) <sup>b</sup>
Presence	2-6	98.9(2.1) to 67(2.9)

<sup>a</sup>Initial samples contained 10μg of copper(II) in 100mL of water; <sup>b</sup>Values in parentheses are RSDS based on five individual replicate analyses.

## RESULTS AND DISCUSSION

### Evaluation of the role of the ligand

Some preliminary experiments were performed for investigation of absence or presence of BHPG on the quantitative extraction of copper(II). It was concluded that the membrane disk itself does not show any tendency for the retention of copper(II), but introduction of 100mL portions of aqueous copper(II) samples containing 10μg of copper(II) and 10mg of BHPG leads to satisfactory its retention (TABLE 2). The latter case is most probably attributed to the existence of a considerable interaction between copper(II) and the BHPG. It should be mentioned that formation of stable complexes between copper(II) and BHPG at pH=2 is probably due to an ion pair formation mechanism. However, at pH higher than 2 the retention and percentage recovery of copper(II) are negligible.

### Choice of eluent

In order to select the most appropriate eluent for the quantitative stripping of the retained copper(II) on the disks, 5mL of various non organic (each containing 10% V.V-1 methanol) and different organic solvents were tested. The results tabulated in TABLE 2. As can be seen, the best eluting solvents were found to be 5mL of methanol or ethanol, resulting in quantitative elution of copper(II) from the disk. It should be emphasized that presence of methanol in any kind of employed solvents helps to better the contact of eluent with hydrophobic surface of the disk.

### The effect of the pH

The pH of the sample solutions were adjusted to different values between 2-9 by addition of hydrochloric acid or a suitable buffer such as sodium acetate-acetic acid or sodium dihydrogen phosphate-disodium hydrogen phosphate, and then solutions passed through the disks.

Eventually, the metal ions were stripped by pure

## Full Paper

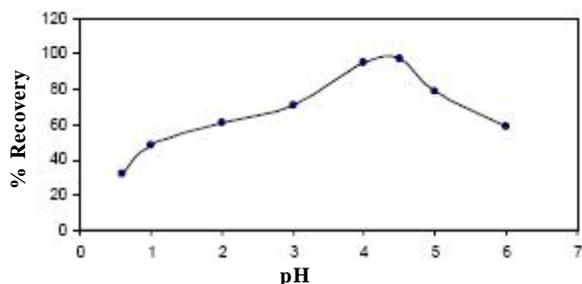


Figure 1 : Influence of sample pH and dissolving solvent of BHPG on the percentage recovery of Cu(II)

TABLE 3 : Effect of different eluting solvents on percentage recovery of copper(II) adsorbed on the disk<sup>a</sup>

Stripping solution	% Recovery		
	2ml	5ml	10ml
Methanol	86(2.6) <sup>b</sup>	98.4(2.9)	99.0(1.9)
Acidified methanol <sup>c</sup>	57(2.3)	88.2(2.2)	83.9(1.7)
Ammoniacal methanol <sup>d</sup>	54 (2.5)	87.5(2.6)	86.9(2.2)
Ethanol	89.1(1.7)	100(1.5)	99.8(1.3)
Acetonitril	33(4.8)	45(5.5)	64(2.6)
Formic acid(1M)10% V.V <sup>-1</sup> methanol	55(1.2)	67(2.0)	71(2.5)
Hydrochloric acid (1M) 10% V.V <sup>-1</sup> methanol	59(1.9)	96.0(2.0)	90(2.9)
Hydrochloric acid (1M)10% V.V <sup>-1</sup> methanol	52(2.5)	83(1.6)	95(1.7)
Nitric acid(2M)10% V.V <sup>-1</sup> methanol	53(1.9)	85(2.2)	86(2.0)
Nitric acid(1M)10% V.V <sup>-1</sup> methanol	64(2.5)	82(2.3)	89(1.7)
Ethanol	83(2.8)	93.5(2.0)	95.7(2.9)

<sup>a</sup>Initial samples contained 10 µg of each copper in 100mL water;

<sup>b</sup>Values in parentheses are RSDs based on five individual replicate analysis; <sup>c</sup>Acidified solvents obtained by addition of 0.1M HCl;

<sup>d</sup>Ammoniacal solvents obtained by addition of 0.1M NH<sub>3</sub>

TABLE 4 : Percent recovery of copper from the modified membrane disk in the presence of 0.01M of different counter anions<sup>a</sup>

Counter anion	%Recovery
Cl <sup>-</sup>	27.0
Br <sup>-</sup>	24.7
ClO <sup>4-</sup>	32.6
SCN <sup>-</sup>	46.8
Picrate	76.6
Acetate	97.9

<sup>a</sup>Initial samples contained 10µg of copper(II) in 100mL of water.

methanol or ethanol solutions followed by flame atomic absorption determination of the eluted copper(II). Then, percentage recovery at various pH values was determined (figure 1). According to the results shown in figure 1 up to pH 4.0-4.5, complete recoveries are obtained. However, at higher pH values, percentage recovery decreases. This is due to fact that in an acidic solution the protonation of BHPG occurs and there is a

weak tendency for retention between Cu(II) and BHPG, whereas at higher values (pH>5), Cu(II) reacts with hydroxide ions to produce Cu(OH)<sub>2</sub>. Therefore, sodium acetate-acetic acid buffer with pH=4.5 was used for the preconcentration step. Other solvents used for dissolving BHPG were methanol and ethanol. The influences of these solvents on the recoveries as a function of pH are compared and shown in figure 1. Meanwhile, other organic solvents were not tested because of their restricted solubility and formation of two phases with aqueous solutions and incompatibility with flame higher pH values (>7) were not tested because of the possibility of the hydrolysis of octadecyl silica in the disks<sup>[47]</sup>.

### Effect amount of counter anion

In order to investigate the effect of counter ion on the recovery Cu<sup>+2</sup> ions by the modified disks, different counter anions were tested TABLE 4, it is immediately obvious that the nature of the counter anion strongly influences the retention of copper ions by the disk. The results revealed that the BHPG behaves as a neutral ionophore in the pH range 4.0-4.5<sup>[49,50]</sup> so that the copper ions are retained as ion pair complexes by the membrane disks. As seen, acetate ion is the most efficient counter anion for the SPE of Cu(II) ions. The influence of the concentration of sodium acetate ion on copper recovery was investigated, and the results are shown in TABLE 4. As seen, the percent recovery of Cu<sup>+2</sup> increased with the acetate concentration until a reagent concentration of about 0.1 M is reached, beyond which the recovery remained quantitative.

Moreover, acetate ion acts as a suitable buffering agent, while it effectively contributes to the ions-pair formation; thus, in the SPE experiments, there was no need for the addition of any buffer solution.

### The influence of flow-rate

One of the most important parameters affecting solid phase extraction is the speed of the process. Hence, the effect of flow-rates on extraction efficiencies was investigated. It was found that in the range of 10-100 mL.min, the retention of Cu(II) was not considerably affected by the sample solutions flow-rates and leads to reproducible and satisfactory results (figure 2). Thus, the flow-rate was maintained at 89mL.min<sup>-1</sup> through-

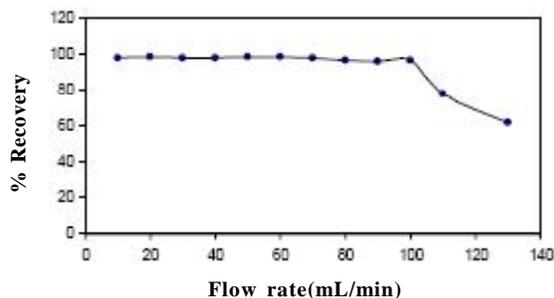


Figure 2 : The effect of the flow-rate on extraction percent of Cu(II)

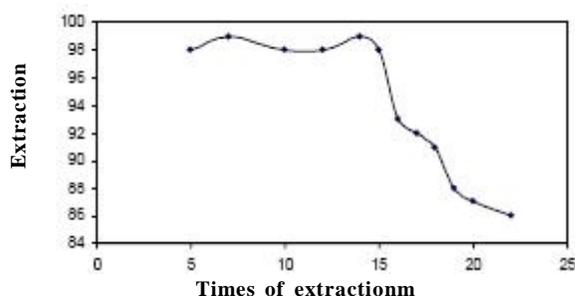


Figure 3 : Influence of eluent type on disk efficiency

TABLE 5 : Influence of the BHPG amount on the recovery of Cu(II) ions<sup>a</sup>

BHPG amount (mg)	Recovery(%) of Cu(II)
2	35(2.2) <sup>b</sup>
5	44(2.9)
8	86(2.8)
10	98.4(2.8)
15	97.9(2.3)
20	98.2(2.1)

<sup>a</sup>Initial samples contained 10 $\mu$ g of each copper in 100mL water;

<sup>b</sup>Values in parentheses are RSDs based on five individual replicate analysis.

out the experiment.

### Quantity of the BHPG

The optimum amount of BHPG for the quantitative extraction of Cu(II) was also investigated by adding various amounts of it to solution (between 2-20 mg). The results are listed in TABLE 5. The experimental results revealed that the extraction of Cu(II) was quantitative using a sample solution containing more than 10 mg BHPG. Hence, subsequent extractions were performed with 15mg of BHPG.

### Disk efficiency

Undoubtedly, one of the major parameters affecting in the SPE determinations is the efficiency of the used membrane disks. However, to the best of our knowledge this case has not been discussed elsewhere

in similar reports. Under the optimum experimental conditions, it was found out that each ENV-18 DISK<sup>TM</sup> disk could perform at least 14 replicate analyses if organic eluting solvents are used. On the other hand, acidic, eluents practically decrease the number of time a disk could be used to 10 replicates. These observations are represented in figure 3.

### Analytical performance

When solutions of 10g copper in 10, 50, 100, 500, 1000, 2000, 2500 and 3000mL solutions under optimal experimental conditions were passed through the disks, the Cu(II) was quantitatively retained in all cases. Thus, the breakthrough volume for the method must be greater than 2500mL, providing a concentration factor of >500. The limit of detection (LOD) of the method for the determination of Cu(II) was studied under the optimal experimental conditions. The LOD based on 3 $\sigma$  of the blank is 5ng per 1000mL.

The capacity of modified disks (5mg BHPG) was determined by passing 50mL portions of sample solutions containing 8mg of copper and 0.1M sodium acetate-acetic acid buffer with pH 4.0-4.5, followed by the determination of the retained metal ions in the eluting solution using AAS. The maximal capacity of the disk obtained from three replicate measurements was 389 $\pm$ 4 $\mu$ g of Cu<sup>+2</sup> on the disk.

In order to investigate the selective separation and determination of Cu<sup>+2</sup> ions from its binary mixtures with various metal ions, an aliquot of aqueous solutions (50mL) containing 10 $\mu$ g Cu<sup>+2</sup> and mg amounts of other cations was taken and the recommended procedure was followed. The results are summarized in TABLE 6. The results show that the copper(II) ions in binary mixtures are retained almost completely by the modified disk, even in the presence of up to about 100mg of various ions. Meanwhile, retention of other cations by the disk is very low and they can be separated effectively from the Cu<sup>+2</sup> ion. It is interesting to note that, in other experiments, we found that in the presence of high enough concentrations NH<sub>2</sub>OH.HCl as a suitable reducing agent (>0.5M)<sup>[48]</sup>. No retention of the resulting single charge Cu<sup>+</sup> ion can occur by the modified membrane disk.

### Analysis of water samples

## Full Paper

**TABLE 6 : Separation of copper from binary mixtures<sup>a</sup>**

Diverse ion	Amounts taken(mg)	% Found	% Recovery of Cu <sup>2+</sup> ion
Na <sup>+</sup>	92.4	1.15(2.9) <sup>b</sup>	98.7(1.8)
K <sup>+</sup>	92.5	1.32(2.1)	98.5(2.2)
Mg <sup>2+</sup>	14.5	0.7(1.8)	98.7(1.7)
Ca <sup>2+</sup>	26.3	1.25(2.0)	99.0(1.8)
Sr <sup>2+</sup>	3.45	2.85(2.2)	98.2(2.0)
Ba <sup>2+</sup>	2.66	3.16(2.4)	98.3(2.5)
Mn <sup>2+</sup>	2.66	1.75(2.3)	98.3(1.8)
Co <sup>2+</sup>	2.17	1.4(2.3)	99.1(2.9)
Ni <sup>2+</sup>	0.11	2.0(2.4)	98.5(2.4)
Zn <sup>2+</sup>	2.78	1.95(2.1)	98.6(2.2)
Cd <sup>2+</sup>	2.58	1.92(0)	98.2(2.8)
Pb <sup>2+</sup>	2.54	2.7(1.9)	98.5(2.7)
Hg <sup>2+</sup>	2.43	2.81(2.1)	98.7(2.8)
Ag <sup>+</sup>	2.67	3.45(2.9)	96.6(2.9)
Cr <sup>3+</sup>	1.76	2.92(2.30)	97.3(2.4)
UO <sub>2</sub> <sup>+</sup>	2.86	2.8(2.1)	98.3(2.7)

<sup>a</sup>Initial samples contained 10 $\mu$ g Cu<sup>2+</sup> and different amounts of various ions in 100mL water(0.1M acetate ion); <sup>b</sup>Values in parentheses are RSDs based on five individual replicate analysis

**TABLE 7 : Recovery of copper added to 1000mL of different water samples ( containing 0.1M acetate at pH= 4.0-4.5)**

Sample	Cu <sup>2+</sup> added( $\mu$ g)	Cu <sup>2+</sup> determined(ng.mL-1)
Tap water	0.0, 10.0	1.84(2.3) <sup>a</sup> 11.87(2.1)
Snow water	0.0, 10.0	4.86(2.3)14.94(2.0)
Rain water	0.0, 10.0	2.66(2.1)12.66(2.8)
Sea Water	0.0, 10.0	12.64(2.9)22.98(2.1)

<sup>a</sup>Values in parentheses are RSDs based on five individual replicate analysis

To assess the applicability of the method to real samples, it was applied to the extraction and determination of copper from different water samples. Tap water (Tehran, taken after 10 min operation of the tap), rain water (Tehran, 26 January, 2006), Snow water (Saveh, 6 February, 2006) and Sea water (taken from Caspian sea, near the Mahmoud-Abad shore) samples were analyzed (TABLE 7). As can be seen from TABLE 4 the added copper ions can be quantitatively recovered from the water samples used.

## CONCLUSION

Results presented in this work demonstrate well the tremendous possibilities offered by the solid phase extraction of trace amounts of Cu(II) in water samples using octadecyl silica membrane disks modified by bis(2-hydroxyphenylamino) glyoxime (BHPG) and its determination by FAAS. The method developed was simple, reliable, and precise for determining copper in

water. Also, the proposed method was free of interference compared to conventional procedures to determine copper<sup>[51-55,57]</sup>. The method can be successfully applied to the separation and determination of copper in binary mixtures.

## ACKNOWLEDGMENTS

The author wish to thank the Chemistry Department of Varamin Campus Islamic Azad University and Saveh Campus Islamic Azad University for financial support.

## REFERENCES

- [1] H.J.M.Bowen; 'Environmental Chemistry of the Elements', Academic Press, New York, 132-135 (1979).
- [2] L.E.Brand, W.G.Sunda, R.R.L.Guillard; J.Exp.Mar. Biol.Ecol., **96**, 225 (1986).
- [3] H.H.Taylor, J.M.Anstiss; Mar.Freshwat.Res., **50**, 907 (1999).
- [4] F.M.M.Morel, R.J.M.Hudson, N.M.Price; Limnol. Oceanogr., **36**, 1742 (1991).
- [5] A.S.Gordan; Mar.Chem., **38**, 1 (1992).
- [6] J.W.Moffett, L.E.Brand, P.L.Croot, K.A.Barbeau; Limnol.Oceanogr., **42**, 789 (1997).
- [7] P.L.Croot, J.W.Moffett, L.E.Brand, Limnol. Oceanogr., **45**, 619 (2000).
- [8] M.Wood, H.K.Wang; Environ.Sci.Technol., **17**, 582A (1983).
- [9] N.N.Greenwood, A.Eamshaw; 'Chemistry of Elements', Pergamon Press, New York, (1984).
- [10] C.A.Burtis, E.R.Ashwood; 'Tietz Textbook of Clinical Chemistry', 3<sup>rd</sup> ed., Macmillan, New York, (1999).
- [11] B.Wetz; 'Atomic Absorption Spectroscopy', VCH, Amsterdam, (1985).
- [12] A.D.Eaton, L.S.Clesceri, A.E.Greenberg; 'Standard Methods for the examination of water and waste water', 19<sup>th</sup> ed, American Public Health Association, Washington, DC, (1995).
- [13] F.J.Welcher, E.Boschmann; 'Organic Reagents for Copper', Krieger Huntington, New York, (1979).
- [14] Z.Marczenko; 'Separation and Spectrophotometric Determination of Elements', Ellis Horwood, London, (1986).
- [15] O.P.Bharagava; Talanta, **16**, 743 (1969).
- [16] A.A.Schilt, W.C.Hoyle; Anal.Chem., **41**, 344

- (1964).
- [17] L.G.Borchart, J.P.Butler; *Anal.Chem.*, **29**, 414 (1957).
- [18] R.Chaisuksant, W.P.Ayuthaya, K.Grudpan; *Talanta*, **53**, 579 (2000).
- [19] D.Kara, M.Alkan; *Microchem.J.*, **71**, 29 (2002).
- [20] K.Saito, S.Murakami, A.Muromatsu, E.Sekido; *Anal.Chim.Acta*, **294**, 329 (1994).
- [21] K.Ikeda, S.Abe; *Anl.Chim.Acta*, **363**, 165 (1998).
- [22] S.Igarashi, N.Ide, Y.Takagai; *Anal.Chim.Acta*, **424**, 263 (2000).
- [23] J.Liu, W.Wang, G.Li; *Talanta*, **53**, 1149 (2001).
- [24] A.N.Anthemidis, G.A.Zachariadis, J.A.Stratis; *Talanta*, **54**, 935 (2001).
- [25] D.Zenedelovska, G.Pavlovska, K.Cundeva, T.Stafilov; *Talanta*, **54**, 139 (2001).
- [26] M.Endo, K.Suziki, S.Abe; *Anal.Chim.Acta*, **364**, 13 (1998).
- [27] M.E.Campderros, A.Acosta, J.Marchese; *Talanta*, **47**, 19 (1998).
- [28] I.Narin, M.Soylak, L.Elic, M.Dogan; *Talanta*, **52**, 1041 (2000).
- [29] Y.Akama, M.Ito, S.Tanaka; *Talanta*, **52**, 645 (2000).
- [30] K.Ohta, H.Tanahasi, T.Suzuki; S.Kaneco; *Talanta*, **53**, 715 (2001).
- [31] V.Cuculic, M.Mlakar, M.Branica; *Anal.Chim.Acta*, **339**, 181 (1997).
- [32] A.Moghimi, M.S.Tehrani, S.Waqif Husain; *Material Science Research India*, **3(1a)**, 27 (2006).
- [33] M.S.Tehrani, A.Moghimi, S.Waqif Husain; *Material Science Research India*, **3(2)**, 135 (2005).
- [34] E.M.Thurman, M.S.Mills; 'Solid-Phase Extraction, Principles and Practice', Wiley, New York, (1998).
- [35] J.Pawliszyn; 'Solid-Phase Microextraction; Theory and Practice', Wiley-VCH, New York, (1997).
- [36] R.M.Izatt, J.S.Bradshaw, R.L.Brueening; *Pure.Appl.Chem.*, **68**, 1237 (1996).
- [37] D.F.Hagen, C.G.Markell, G.A.Schmitt; *Anal.Chim.Acta*, **236**, 157 (1990).
- [38] C.J.Krueger, J.A.Fil; *Anal.Chem.*, **67**, 3363 (1995).
- [39] K.Z.Taylor, D.S.Waddell, E.J.Reiner; *Anal.Chem.*, **67**, 1186 (1995).
- [40] Y.Yamini, M.Ashraf-Khorassani; *J.High Resolut.Chromatogr.*, **17**, 634 (1994).
- [41] M.Shamsipur, A.R.Ghiasvand, Y.Yamini; *Anal.Chem.*, **71**, 4892 (1999).
- [42] M.Shamsipur, A.R.Ghiasvand, H.Sharghi; *Int.J. Environ.Anal.Chem.*, **82**, 23 (2001).
- [43] J.Brunner, A.Mokhir, R.Kramer; *J.Am.Chem.Soc.*, **125**, 12410 (2003).
- [44] F.H.Zelder, J.Brunner, R.Kramer; *Chem.Commun.*, 902 (2004).
- [45] I.Boll, R.Kramer, J.Brunner, A.Mokhir; *J.Am.Chem.Soc.*, **27**, 7849 (2005).
- [46] D.F.Hagen, C.G.Mrkell, G.A.Schmitt, D.D.Blevins; *Anal.Chim.Acta*, **236**, 157 (1990).
- [47] Y.Yamini, N.Alizadeh, M.Shamsipur; *Anal.Chim.Acta*, **69**, 355 (1997).
- [48] Y.Petit de Pena, M.Gallego, M.Valcarcel; *Anal.Chem.*, **67**, 2524 (1995).
- [49] N.Alizadeh, H.Naeimi, H.Sharghi, Samsipur, M.Polish; *Polish.J.Chem.*, **73**, 915 (1999).
- [50] N.Alizadeh, H.Naeimi, H.Sharghi, Samsipur, M.Polish; *Fresenius, J.Anal.Chem.*, in press.
- [51] Y.SChoi, H.S.Choi; *Bull.Korean.Chem.Soc.*, **24**, 222 (2003).
- [52] E.Matoso, L.T.Kubota, S.Cadore; *Talanta*, **60**, 1105 (2003).
- [53] B.Purachat, S.Liawruangrath, P.Sooksamiti, S.Rattanaphani, D.Buddhasukh; *Anal.Sci.*, **17**, 443 (2001).
- [54] A.A.Ensafi, S.Abbasi, H.Rahimi Mansour, I.Mohammad pour Baltork; *Anal.Sci.*, **17**, 609 (2001).
- [55] M.Saber Tehrani, F.Rastegar, A.Parchehbaf, Z.Rezvani; *Chinese Journal of Chemistry*, **23**, 1437 (2005).
- [56] A.Moghimi; *Material Science Research India impress*, (2006).
- [57] A.Moghimi; *Material Science Research India impress*, (2006).