



# BioTechnology

*An Indian Journal*  
FULL PAPER

BTAIJ, 8(9), 2013 [1295-1299]

## Study on quality control method of distribution transformer based on game theory

Tianshu Bi<sup>1</sup>, Jinmeng Chen<sup>1,2\*</sup>, Meng Sun<sup>2</sup>

<sup>1</sup>North China Electric Power University, (CHINA)

<sup>2</sup>State Grid Material Corp, (CHINA)

E-mail: chenjinmeng@sgm.sgcc.com.cn

### ABSTRACT

The government sampling inspection pass rate of Distribution Transformers (DTs) is less than 75% in China, which causes serious impact to the product quality and brings serious security risks. In order to improve the whole quality of DTs and energy security, it has important significance to study quality control method. The main quality defects and reasons of the DTs are introduced. The game theory of sampling inspection is analyzed. The method of establishing quality information system of DTs based on life cycle theory is proposed, which includes production, installation, operation and maintenance process. The DT's quality control method based on life cycle information is study on. The effect of the method is verified by the distribution transformer sampling example of State Grid Corporation of China(SGCC). © 2013 Trade Science Inc. - INDIA

### KEYWORDS

Distribution transformers;  
Life cycle theory;  
Quality control;  
Game theory;  
Energy security

### INTRODUCTION

In recent years, China distribution equipment enterprises increase investment, expand the throughput, which causes the DT market overcapacity and fierce competition<sup>[1]</sup>. The enterprises take low price competition strategy, while some hold down cost deliberately, in order to take the market share. A few enterprises use the inferior raw material (such as instead of copper wire with aluminum, used silicon steel sheet) during the production process in order to reduce the costs, which causes the loss, partial discharge and temperature rise of DTs unconformity.

It also causes serious impact to the product quality, and brings serious security risks. The government sam-

pling inspection pass rate of DTs is less than 75% in recent three years. It has important significance to study quality control method to improve the whole quality of DTs.

### QUALITY DEFECTS ANALYSIS

The government entrusts the specialty testing institution to inspect the DTs by sampling from 2009 to 2011. The testing items include measurement of winding resistance, voltage ratio and check of phase displacement, short-circuit impedance and load loss, no-load loss and current, separate source AC withstand voltage test, short-duration induced AC withstand voltage test, temperature rise, measurement of partial dis-

## FULL PAPER

charge and insulating oil test. 87 DTs are tested, 22 of them un conformity, where the pass rate is less than 75%. The detail information is shown in TABLE 1.

TABLE 1 : The sampling test pass rate of 2009-2011

Date	Total sample	un conformity	Pass rate
2009	29	7	75.9%
2010	29	6	79.3%
2011	29	9	69.0%
total	87	22	74.7%

The un conformity items mainly include temperature rise, load loss, no-load loss and partial discharge.

### Temperature rise

Temperature rise test checks the DT's heat, which is determined by the loss of DT. For the oil-immersed type DT, the influence factors of cooling include product structure, winding up state, oil tank capacity and radiator area, oil circulation. For the dry-type DT, it is related to the air ventilating duct of core and windings, insulation wrapping, resin-casting.

DT temperature rise test belongs to type test, and few enterprise tests the item before its delivery. It is difficult to detect the defect. Due to the irregular market competition, some enterprises reduce the oil tank capacity and radiator amount, decrease the design margin of conductor and core, and even use the inferior materials, in order to reduce the cost. All of that result in excessive temperature rise of the DT, which will accelerate the aging of the insulation materials. It also affects the DT useful life, security, reliability, and even leads to short-circuit, accident, which brings safe hidden trouble to the user.

### No-load loss and load loss

The no-load loss of DT mainly comprises hysteresis loss and eddy-current loss. Hysteresis loss depends on the silicon sheet steel materials. Eddy-current loss is related to the flux density, thickness of silicon sheet steel and the frequency. The load loss of DT is mainly consisted of windings and leads resistance loss. The additional losses caused by leakage flux take very small proportion<sup>[2]</sup>. The un conformity of those items is mainly because of enterprise's dishonest behavior. Some enterprises decrease the design margin, without considering the raw materials and production process devia-

tion, in order to reduce the materials cost.

## QUALITY CONTROL THEORY ANALYSIS

### Key factors to the product quality

Product quality not only constraints by interior of the enterprise, but is also affected by the external environment<sup>[3]</sup>. The quality problem is not limited to only enterprise its-self; it is also related to the whole society. The key factors affecting the product quality are from of enterprise interior, including the enterprise lead's cognition, quality organization level, worker's actual ability, high quality raw materials, advanced technique and equipments, reliable inspection.

### Game theory of sampling inspection

The selection mode of the rules for the enterprise depends on the total income, including obeying rules income  $R_l$ , disobeying rules income  $R_o$ , and the probability punishment for disobeying rules  $F$ . If  $R_l > (R_o - F)$ , the enterprise probably obey the rules; if  $R_l < (R_o - F)$ , the enterprise may not obey the rules<sup>[4,5]</sup>.

### Hypothesis

- (1)  $N = \{1, 2\}$  is a set of the two sides in the game. 1 stands for the enterprise. 2 stands for the sampling inspection unit.
- (2)  $\Theta = \{\theta_0, \theta_1\}$  is the enterprise type space, which is private information of the enterprise. The sampling inspection unit does not know the value of  $\theta$ , but can get the probability of  $\theta$ :  

$$P\{\theta = \theta_1\} = \alpha;$$

$$P\{\theta = \theta_0\} = 1 - \alpha;$$
 where  
 $\theta_1$  the enterprise obey the rules  
 $\theta_0$  the enterprise not obey the rules
- (3)  $M = \{S_0, S_1\}$  is a set of enterprise signal space.  
 where  
 $S_0$  the enterprise does not put up production and sales.  
 $S_1$  the enterprise still puts up production and sales.
- (4)  $A = \{a_0, a_1\}$  is a set of the sampling inspection unit action.  $a_0$  stands for no sampling.  $a_1$  stands for sampling.

### Game Sequence and solution

First step: the enterprise select the signal

$m(\theta)=S \in M$  based on the private information. It means the enterprise can select to produce and sale the conformity or unconformity product.

Second step: the sampling inspection unit observes the signal  $S_k, k=0,1$ , and then form the inference about type  $\theta$ :

$$\pi_k = p\{\theta = \theta_1 | m = S_k\}, k=0,1,0$$


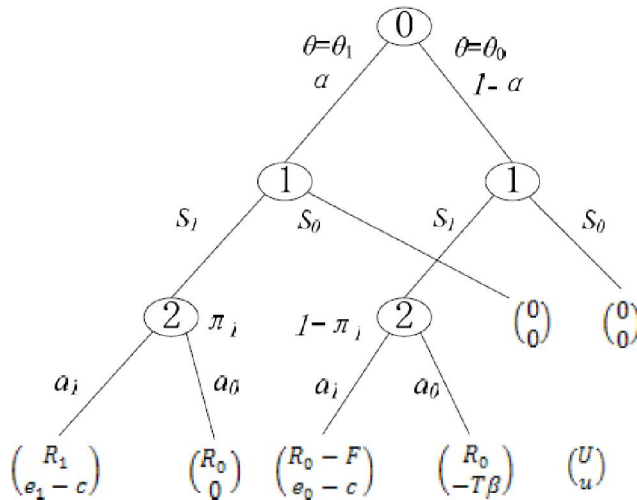


Figure 1 : Game sequence diagram

It is solved that the sampling inspection unit inference complied with the sub-game refined Bayesian equilibrium, and the enterprise inference complied with the sub-game refined Bayesian equilibrium. The solution is shown in the follow figure.



$$\pi^* = \frac{e_0 - c + T\beta}{e_0 - e_1 + T\beta}$$

where

- $c$  the cost of sampling inspection unit.
- $e_1$  the reward sampling inspection unit obtained without finding the quality defects, according to the rules.
- $e_0$  the reward sampling inspection unit obtained, when they find the quality defects.
- $T$  the punishment for the sampling inspection unit nonfeasance.
- $\beta$  the probability that sampling inspection unit nonfeasance can be found.
- When  $\pi \in D_2$ , namely  $\pi^* < \pi \leq 1$ , it is pooling equilibrium.
- When  $\pi \in D_1$ , namely  $0 < \pi \leq \pi^*$ , it is pooling equilibrium.

Only  $\pi^*$  close to 1, namely  $e_1 = c$ , and  $R_0 - F < 0$ , it is separating equilibrium.

The award sampling inspection unit obtained should not be less than the inspection cost, and the punishment should more than the disobeying rules income.

**$R_0, R_1$  and  $F$**

The value of  $R_0, R_1$  depends on the enterprise. It can be regarded as fixed in a period. The value of  $F$  is proportional to  $f_s, p_s, p_c, c_p$ , namely

$$F = f(f_s, p_s, p_c, c_p),$$

Where

- $f_s$  the frequency of sampling inspection.
- $p_s$  the probability of finding defects by sampling inspection.
- $p_c$  the probability of enterprise's problem.
- $c_p$  the loss because of the punishment.

The values of  $f_s, p_s, c_p$  are related to the sampling inspection. The reasonable value of  $F$  can be obtained though scientific setting, which makes  $R_1 > (R_0 - F)$ .

**THE QUALITY CONTROL METHOD**

**The life cycle quality information system**

The life cycle quality information of DTs covers the following stage: purchasing, design, manufacturing, packaging, transportation, installation, debugging and operation. The analytic hierarchy process can be used to classify the quality defects of DTs<sup>[6]</sup>. The life cycle quality information system can be established, which can provide support to enhance the quality control. The DT quality information should include the enterprise information, product type, technique requirement, project name, the quality defects, classification of defects, weight of defects, date information, detailed analysis, improvement measures, and information source.

**The quality control method based on life cycle theory**

The ultimate goal of enterprise management is profit. In order to guide the enterprise pay attention to quality, the reasonable profit  $R_1$  should be guaranteed in the purchasing period. Based on the DT life cycle quality information, the sampling inspection method is ordinarily adopted, combination with the manufacturing supervision.

## FULL PAPER

According to the contract, the manufacturing supervision enterprise constitutes an expert group to supervise and witness the DT manufacturing process and schedule<sup>[7]</sup>. The whole manufacturing process can be witnessed, but the cost is high. It is applied to the enterprise with more problems. The sampling inspection is to test the sample of product. The items include product performance, parameters, raw materials and components<sup>[8]</sup>. The quality control flow based on life cycle information is shown in figure 2.

$p_c$  can be obtained through the DT life cycle quality information system. Compared  $p_c$  with  $p_{cset}$  in size, the manufacturing supervision method is taken, when the enterprise has more quality problems. Otherwise, the sampling inspection method is adopted.  $p_c$  is proportional to  $f_s$ , which should be higher to enterprise with more problems.

$p_s$  depends on the scientific sampling inspection method, closely related to the test items. The items should be tested, which are easy to find problem and have serious influence to the security operation, such as the following items: temperature rise test, short-circuit impedance, no-load loss and current, separate source AC withstand voltage test, short-duration induced AC voltage test, measurement of partial discharge. Some time short-circuit withstand test can be taken to check the DT short circuit withstand ability. We also can disassemble the DT to check the materials of conductor and silicon sheet steel.

It is determined by the punishment measures largely, whether sampling inspection plays the role. The punishment measures should consider the DT's quality defects and lost.

### EXAMPLE ANALYSIS

In 2012, the sampling inspection of DTs was strengthened for SGCC. The items include visual inspection, key performance testing and disassembly inspection. The performance items include no-load current and on-load loss, short circuit impedance and load loss, temperature rise, and so on.

During the sampling inspection, the corresponding punishments were taken to the enterprises for their unconformity product. According to the severity of the sampling unqualified product and the punishment

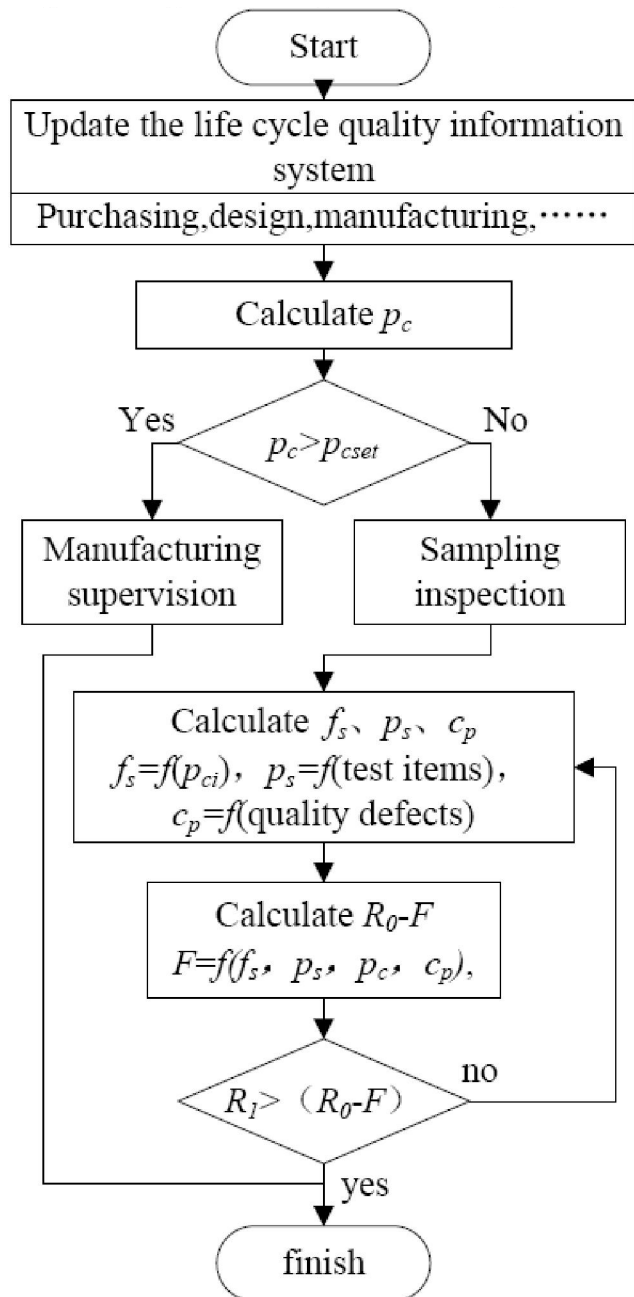


Figure 2 : Quality control flow based on life cycle information

criterion, the treatments of liability for breach of contract, replacement of the batch product were taken. The related suppliers cooperated with the recall or replacement actively. 9578 DTs were sampling inspected in 2012. 660 DTs of that were unqualified with 691 unqualified items. The qualified rate of sampling inspection is up to 93.11% compared with 61.26% of 2011<sup>[9]</sup>. The unqualified items are shown in figure 3. The unqualified rates of DTs are shown in figure 4.

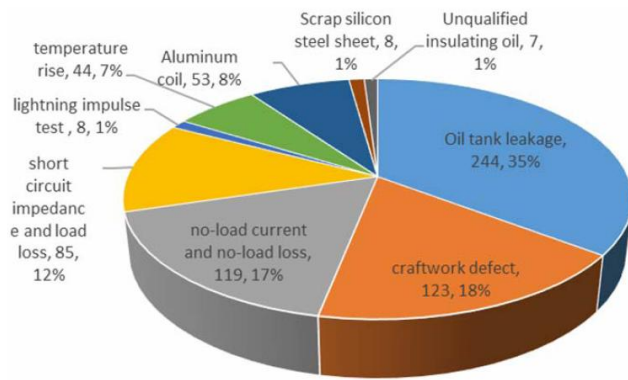


Figure 3 : DTs unqualified items distribution of sampling inspection

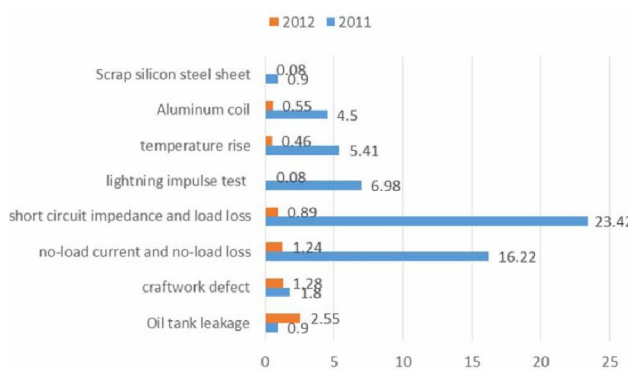


Figure 4 : 2011-2012 DTs unqualified rate of sampling inspection

### CONCLUSION

The government sampling inspection shows that the sampling inspection cannot solve the problem without the corresponding punishment measures. It only reflects the problems of the DT industry and enterprises.

The game theory of the sampling inspection and example are analyzed. The validity of the quality control method is approved, which is based on life cycle information. Through the reasonable frequency, scientific methods and punishment measures, the risk of breach of contract will be increased and the costs of breach of contract will rise up. The quality supervision effect will be given full play to.

### REFERENCES

- [1] Lanmin Wu, Shuqi Zhang; Transformer product quality rise up largely in China, lighting newspaper, **4**, 25 (2012).
- [2] Yucheng Xie; Power Transformer Manual, China machine press, Beijing, China, 88-90 (2008).
- [3] Zhen He, Ping Wan, Changgui Li; manufacturing industry quality control situation and strategy in China, Journal of Tianjin University (social science), **4**, 18-19 (2010).
- [4] Robert, Gibbons; A Primer in Game Theory, China social science press, Beijing, China, 15-49 (1999).
- [5] Zhiguo Sun; research on the problem of regulation of product quality in China – an angle of law-and-economics, Jilin University, jilin, China, 52-60 (2006).
- [6] T.L.Saaty; Decision making - The Analytic Hierarchy (AHP/ANP), Journal of Systems Science and Systems Engineering, **13**, 9-15 (2004).
- [7] State Grid Corporation of China; Power Transformer Manufacturing Supervision Working Specification, China electric power press, Beijing, China, 3 (2011).
- [8] State Grid Corporation of China; Distribution Transformer Sampling Inspection Working Specification, China electric power press, Beijing, China, 4 (2011).
- [9] State Grid Corporation of China; Distribution Transformer Sampling Inspection Repoert, <http://ecp.sgcc.com.cn/>, (2012).