

2014

BioTechnology

An Indian Journal

FULL PAPER

BTAIJ, 10(13), 2014 [7449-7454]

WSB-TPMS applications in the automotive tire pressure tests

Huagang Liu, Ruican Hao


Complex and Special-shaped Pieces of Processing Technology Research, Beijing Polytechnic, Beijing 100176, (CHINA)

ABSTRACT

Indirect tire pressure monitoring system (WSB-TPMS) is an effective tool to measure and display the conduct of automobile tire pressure by monitoring and comparing the performance of automobile tires speed. It is not only timely and accurately delivery of tires for users pressure of real-time information to ensure driving comfort, but also abnormal tire pressure alarm, thereby alerting the user to exclude risks, to ensure driving safety. In this study, the principles of tire pressure monitoring system (TPMS) as well as WSB-TPMS systems are described. In particular, related to the calculation method for tire pressure and work steps of WSB-TPMS system information for a more systematic analysis. Next, the WSB-TPMS system application performance in the automotive tire pressure tests were discussed from the temperature testing, pressure testing and power consumption test, etc.. WSB-TPMS system with accuracy, reliability and stability in these areas, the system can be widely used for automobile tire pressure testing. Research around the car to test the tire pressure unfolds, demonstrated the monitoring function WSB-TPMS system, and thus have a strong practical significance.

KEYWORDS

Indirect tire pressure monitoring system; WSB-TPMS; Tire pressure test.



INTRODUCTION

Car tire pressure testing is an important security configuration items, which can effectively reduce the uneven force caused by a puncture accident. However, since many of the current system of ordinary models do not include equipment tire pressure testing system, so the ordinary motorists did not have sufficient knowledge of tire pressure testing, and routine maintenance of the car did not attach great importance to the work. Tire pressure too low or too high is not conducive to play car performance. When the tire pressure is too high, the area of the tire force (effective contact area with the road surface) will be small. This will reduce the tire pressure on the one hand a space, on the other hand will reduce the tire grip, which may cause the car bit slip occurs in the process of moving, and even increase the risk of accidents. In the process of driving a vehicle, people's own direct experience can know if excessive tire inflation, poor road conditions when passing lots, vibration sense cars will be relatively more pronounced, thus affecting driving comfort. And when tire pressure is too low, the car's axle deformation damage, and through ups and downs road will also damage site and other important parts for cars. Therefore, the detection and control the tire pressure on the car driving safety, comfort and an increase in car use age has an important role. For this reason, many car brands will be specially designed and equipped for the automotive tire pressure measurement system. The so-called tire pressure measurement system (tire pressure monitoring system, abbreviated as TPMS) refers to driving (use) an automatic car tire pressure tested, and tire pressure close to and over the upper and lower limit alarm, ensuring the safety of the car use. Tire pressure test system can be divided into direct tire pressure measurement system (Direct Tire Pressure Monitoring System, DTPMS) and indirect tire pressure measurement system (Wheel-Speed Based TPMS, referred WSB). Next, the paper will test the system of indirect tire pressure in a car tire stress test application to discuss issues, hoping to apply indirect tire pressure test system has some role.

TPMS AND WSB-TPMS PRINCIPLES

TPMS principles and classification

Tire pressure monitoring system (tire pressure monitoring system, abbreviated as TPMS) is a system which can travel in the (use) of the car's automatic tire pressure tested. It can be close to hand over the upper and lower limit alarm tire pressure, to ensure the safety of motor vehicles. When the car in traffic occurred during the leak, the tires pressure lower than the load, tire pressure drops, the tire pressure monitoring system can be determined by the poor condition of the tire pressure occurs between the rotation speed comparison tires and locking tires. In actual use, the tire pressure monitoring system can be divided into direct tire pressure measurement system (Direct Tire Pressure Monitoring System, DTPMS) and indirect tire pressure measurement system (Wheel-Speed Based TPMS, referred WSB). Their works are different. DTPMS is operational process requires the car to the original valve with a valve sensor instead. Thus, with a valve sensor for sensing can be carried through which the temperature sensor chip car tires, tire pressure, etc. It will be perceived transmitting information obtained in the form of the control system to DTPMS RF signal within the receiver. DTPMS not only can sense the motion state of automobile tires tire pressure and temperature, also can sense body under stationary state changes of the tire pressure and temperature of the tire. DTPMS now been more widely used. Most domestic cars and imported cars are using a small part of such a tire pressure monitoring system. DTPMS corresponding is indirect tire pressure measurement system (WSB-TPMS), which works with direct tire pressure test system (DTPMS) are apparently different. In the next section will be devoted.

WSB-TPMS principles

Indirect tire pressure test system (WSB-TPMS) works compared with direct tire pressure measurement system (DTPMS) works, the pressure signal from the transmission are in different ways. Specifically, WSB-TPMS sensor does not carry the valve body to obtain a tire pressure, temperature, and other information through the toughness. Relatively, in order to obtain this information, the system would be to obtain the vehicle body by way of a non-contact tire pressure. Thus, WSB-TPMS operation needs to use the car's ABS system (Anti-locked Braking System, is a kind of anti-skid, anti-lock etc. automobile safety control system) carried to get the speed of the wheel speed sensor body each tire. And tire pressure monitored by comparing the difference in speed and tires as well as their timing variations. Shown in Figure 1, WSB-TPMS works comprising three phases:

(1) ABS speed sensor system to capture car speed. When the vehicle is running in a pressure increase or decrease, the effective radius of the tire is increased or reduced accordingly, which will affect the speed of the tire. The speed of tire pressure increasing is lower than the normal rotational speed, and the speed of the tire pressure reducing is higher than normal tires. ABS speed sensor system will be passed to the ABS system control unit after capturing this information.

(2) ABS system control unit to analyze the speed of the received information. ABS system control unit through a particular algorithm analyze wheel speed indicator parameters, and the results will be passed to the alarm system.

ABS control unit will use an algorithm to calculate the received message as follow:

$$n = \frac{\omega_{FL} \bullet \omega_{RR}}{\omega_{FR} \bullet \omega_{RL}} \quad (1)$$

In formula (1), n represents the rate of the tire rotation (in the interval [0,1]). ω indicates the rotational speed of the tire body. F/R : Front / rear tires, R/L : left / right tires.

According to the principles of automobile kinematics, car tires speed according to the following formula:

$$\omega = \frac{v_{FL}}{r_{FL}} (1 - S_{FL}) \cos \alpha_{FL} \tag{2}$$

In formula (2), ω represents the rotational speed body of the tire. v_{FL} indicates the speed of the car before the tire row. r_{FL} represents the effective radius of the vehicle tires. α_{FL} the tire angle of slide, and S_{FL} represents a rotation of the tire slip ratio (in the interval [0, 1]).

Under normal circumstances, a very small car tire slip angle, is negligible. Therefore, it is assumed that $\cos \alpha_{FL} = 1$, and also may be assumed that the sliding angle of about the same axis and the slip ratio of the tire both the same. Then, the relationship between the effective radius of each tire can be used as shown in formula (1) of the wheel speed the equation used to express the relationship between the pressure of the tires according to the relationship can be expressed as follows, namely:

$$n = \frac{\omega_{FL} \cdot \omega_{RR}}{\omega_{FR} \cdot \omega_{RL}} \approx \frac{r_{FR} \cdot r_{RL}}{r_{FL} \cdot r_{RR}} \tag{3}$$

In formula (3), the meaning of each parameter is as same as formula (1) and (2) .

(3) The alarm system to make the police. When the ABS system control unit through the analysis of information and control indicators abnormalities (higher or lower than the control indicators), alarm system warning light will illuminate and audible car maintenance personnel or the driver.

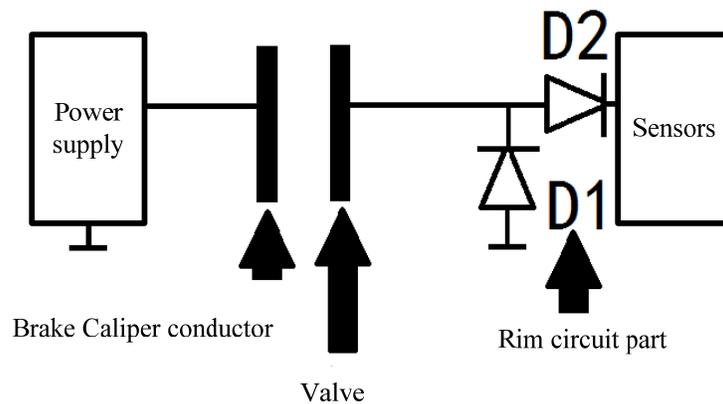


Figure 1 : The principle of indirect TPMS figure

WSB-TPMS measurement range are mainly three kinds: there is only one vehicle tire leak, there are two on the angular position of the body in a tire leak occurs, there are three tires (any position) leak. These three kinds of anomalies in the tires when the vehicle tire rotation rate (n) is less than 1 the ABS system analysis and alert by WSB-TPMS. WSB-TPMS tire making body monitoring the situation for some flat tire can not be effectively monitored, for example, about an axle with two tires at the same time there is leakage, two tires on the same side of the body at the same time there is leakage, four tires at the same time leak or when the vehicle speed exceeds 100 mph. In this time, the WSB-TPMS will fail, these leaks without sadly effective monitoring and prompt the driver.

WSB-TPMS APPLICATIONS IN THE AUTOMOTIVE TIRE PRESSURE TESTS

In the course of the WSB-TPMS tire pressure is applied to the test, it will involve temperature, power consumption, pressure and other projects. Next, the paper these three items were test analysis. In the test, WSB-TPMS system will follow the framework shown in Figure 2 for testing operations.

Temperature test of WSB-TPMS tire pressure test WSB-TPMS

The temperature range of this experiment is 40 ~ 150 , and the temperature value can be set to a certain constant temperature. Test the temperature with a resolution of 1 , namely temperature changes by more than 1 will be recognized when the otherwise indistinguishable. Implementation process as follows:

- (1) WSB - TPMS equipped with batteries, so that all parts of the system are in operation. At the same time, open the ABS system. Module for receiving a signal and a tire pressure information transmission module connected to the power supply.
- (2) The transmission module of the tire pressure information is placed in a thermostat to adjust and set the temperature. While the received signal module is placed next to the thermostat side in order to read.
- (3) Record the experimental data and statistics out in tabular form.

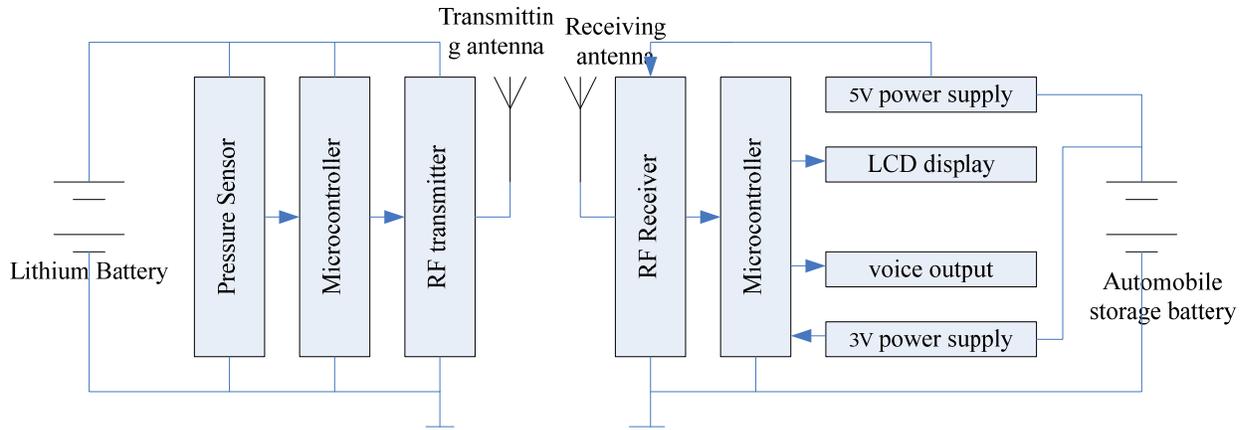


Figure 2 : WSB - TPMS system work framework

As shown in TABLE 1, the measured temperature of the test data with the variation of oven temperature set point changes:

TABLE 1 : Temperature test data

Oven temperature value (°C)	-30	-28	-26	-24	-22	-20	-18	-16	-14
Temperature value of the received signal modules displayed (°C)	-30	-30	-28	-25	-22	-20	-19	-17	-14
Oven temperature value (°C)	-12	-10	-8	-6	-4	-2	0	3	6
Temperature value of the received signal modules displayed (°C)	-12	-10	-7	-6	-4	-2	0	3	6
Oven temperature value (°C)	9	12	15	18	21	24	27	30	33
Temperature value of the received signal modules displayed (°C)	9	12	15	18	21	24	27	30	33
Oven temperature value (°C)	36	39	42	45	48	51	54	57	60
Temperature value of the received signal modules displayed (°C)	36	39	42	45	48	51	54	57	60
Oven temperature value (°C)	63	65	68	71	74	77	80	83	86
Temperature value of the received signal modules displayed (°C)	63	65	68	71	74	77	80	84	86
Oven temperature value (°C)	89	92	95	98	100				
Temperature value of the received signal modules displayed (°C)	90	92	96	99	101				

From the detected temperature record in TABLE 1 can be found that the temperature detection effect of WSB-TPMS is more accurate, especially in -14 to 80 within this range. The receiver display temperature readings and thermostat module are exactly the same, no deviation. While outside this temperature range, the majority of test temperature value is also consistent with the oven temperature values. This proves that the WSB-TPMS used within the tire body temperature monitoring is reliable.

Pressure test of WSB-TPMS tire pressure test WSB-TPMS

The pressure test procedure consists of the following three steps:

- (1) Start monitoring equipment: Install the battery for signal transmission module, display module for receiving, WSB-TPMS system and the ABS system connected to an external power source.
- (2) The signal transmission module placed in a pressure vessel testing and closed pressure vessel. Meanwhile, the pressure signal reception display module is placed next to the side of the pressure vessel.
- (3) Adjusting the pressure of the pressure vessel, began to experiment and record and statistics.

As shown in TABLE 2, the test pressure data obtained in this experiment with changes in the pressure of the pressure vessel and showing the same trend changes.

TABLE 2 : Pressure test data

Pressure vessel pressure readings (kPa)	100.0	115.2	135.7	157.2	176.8	195.9	214.4	233.9
Pressure signal receiver pressure readings (kPa)	100.0	115.1	135.8	156.9	176.6	196.1	214.2	233.7
Pressure vessel pressure readings (kPa)	255.0	274.9	295.1	316.1	324.7	345.1	366.2	380.0
Pressure signal receiver pressure readings (kPa)	249.8	274.5	295.0	316.2	324.5	344.9	366.3	379.8

As can be seen from TABLE 2, test data trend is consistent between the normal data in the data field showing the pressure vessel and test vehicle tire pressure read by the display. Although there is an error between these two types of data, but the error is very small value gap between each set of data within 0.5 kPa. Error sources may be a long time for pressure vessel, some parts loose and cause the display lag. It also may be due to the presence of air pressure in the pressure vessel caused the reading changes. Tests also may be due to the resolution of the sensor used to accept the result of inappropriate reading the display module errors. Since the error is extremely small, almost negligible, so the test is a powerful illustration of the monitoring WSB-TPMS tire pressure system carried out is accurate, credible.

Power consumption test of WSB-TPMS tire pressure test

WSB - TPMS system in the process of tire pressure test, its power consumption not only affects the life of the system itself, but also affect the accuracy of the test results, so it is necessary to carry out tests to verify its power consumption. The operation of WSB - TPMS systems need to consume battery. If the battery runs out in the process of car use, its function will be hard to play, and may cause interference to the driver, affect the driving safety and comfort. Therefore, the power consumption of WSB-TPMS system experimental test is very necessary.

In WSB-TPMS system, the influence factors of energy consumption have signal transmission frequencies and sampling rates of ABS. The sampling rate ABS system at a high level, its power consumption will reach several mill amperes per second (mA). And when its low sampling rate, power consumption is only ten microamperes (uA). Therefore, when using WSB-TPMS tire pressure system tested, to minimize the use of high-frequency clock. In this study, the ABS system microcontroller clock is set to 1MHz, and the measurement interval is set to 3s. When tire pressure exceeds the upper and lower temperature exceeds the upper or lower limit, the microcontroller ABS system shall transmit an alarm. After measuring the current consumption of the measurement modules are displayed in different states as shown in TABLE 3.

TABLE 3 : Tire measuring the emission module state of current consumption

measuring module state	working current (mA)	working time (s)
measuring state	0.012	58.33
dormant state	2.5	0.015x20
emission state	7.3	0.026

TABLE 3 is a test of statistical data, it can calculate the average hourly measurement module operating current is:

$$I = (0.012 \times 58.33 + 2.5 \times 0.015 \times 20 + 7.3 \times 0.026) / 60 = 0.027329mA$$

Since WSB-TPMS system used battery capacity is generally 500mA, therefore, the battery can supply time for

$$T = 5000.027329 = 18295.36 h = 2.1175 year$$

It can be seen that WSB-TPMS system can work for not less than 2 years. Since the system will only work in the process of the vehicle. The vehicle in the stall state does not produce energy computation, and therefore must be more than the actual useful life of 2 years. This ensures the stability of the system, thereby reducing the energy consumption of the system is generated due to loss of energy. See, WSB-TPMS system for automobile tire pressure monitoring is stable and reliable, it can ensure that the risk of a user over an extended period from energy depletion.

WSB-TPMS system can effectively real-time monitor and real-time feedback for automobile tire pressure. The user can not only ensure the comfort of the car, they can also use the user's security alerts provide timely and reliable information, so that the system can then tire pressure test widely used.

CONCLUSION

This study through WSB-TPMS systems in the automotive tire pressure monitoring process temperature monitoring capabilities, pressure monitoring capability and power status test to prove the accuracy, reliability and stability of the system. In fact, WSB-TPMS system can effectively real-time monitor and real-time feedback for automobile tire pressure. The user

can not only ensure the comfort of the car, they can also use the user's security alerts provide timely and reliable information, so that the system can then tire pressure test widely used.

REFERENCES

- [1] Tao Guibao, Pangli; Direct tire pressure monitoring system design, Chongqing University, **3**, 52 (2011).
- [2] Zhang Fu, LiXinping, Fu Sanling; Tire pressure monitoring system in the application of the vehicle tire safety, **4**, 49 (2012).
- [3] Tong Liwen, Yu Tao, Pan Yi; Tire pressure monitoring system[J], Micro Computer Information, **22(7)**, 112 (2011).
- [4] Lu Zhaoquan, Shen Junfeng; Tire pressure monitoring system[J], Hefei University of Technology (Natural Science Edition), **30(3)**, 312 (2011).
- [5] Gao Xianjin, Wang Guolin, Ying Shizhou; The development trend of tire pressure monitoring system [J], Tire industry, **27(8)**, 45 (2012).
- [6] Yan Chongguang; TPMS sensor module dedicated technical analysis[J], Electronic Design & Application, **3(11)**, 26 (2012).